


Spectrum Parameters

x: 0.1806 y: 0.0900
 u: 0.1942 v: 0.1452
 WD: 460.5 nm WP: 384.2 nm
 HW: 16.0 nm Purity: 80.355
 CCT: 100000 K Ra: 39.7
 SDCM : 127.95 DUV : -0.0975
 Ratio: R%: 7.6 G%: 0.6 B%: 91.8
 Kred 5.13% Kgreen 71.67% Kblue 23.19%
 R1: 55.3 R2: 84.6 R3: 26.2
 R4: 17.2 R5: 53.5 R6: 9.5
 R7: 56.0 R8: 15.1 R9: -76.6
 R10: 46.6 R11: 20.9 R12: -44.9
 R13: 56.7 R14: 58.6 R15: 58.4

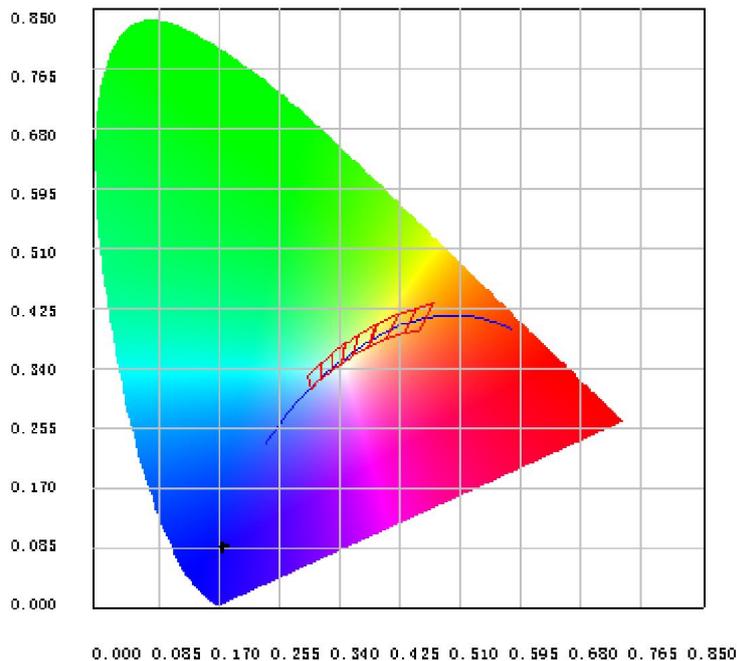


Electrical parameters

Flux: 14.696 lm E: 12.381 lm/w P: 398.68 mw
 I: 350.0 mA V: 3.39 V P: 1.187 w PF:


Memo:

Product Mode: 1	Item No: 16
Tester: Y	Date: 2025-03-22 11:14
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电

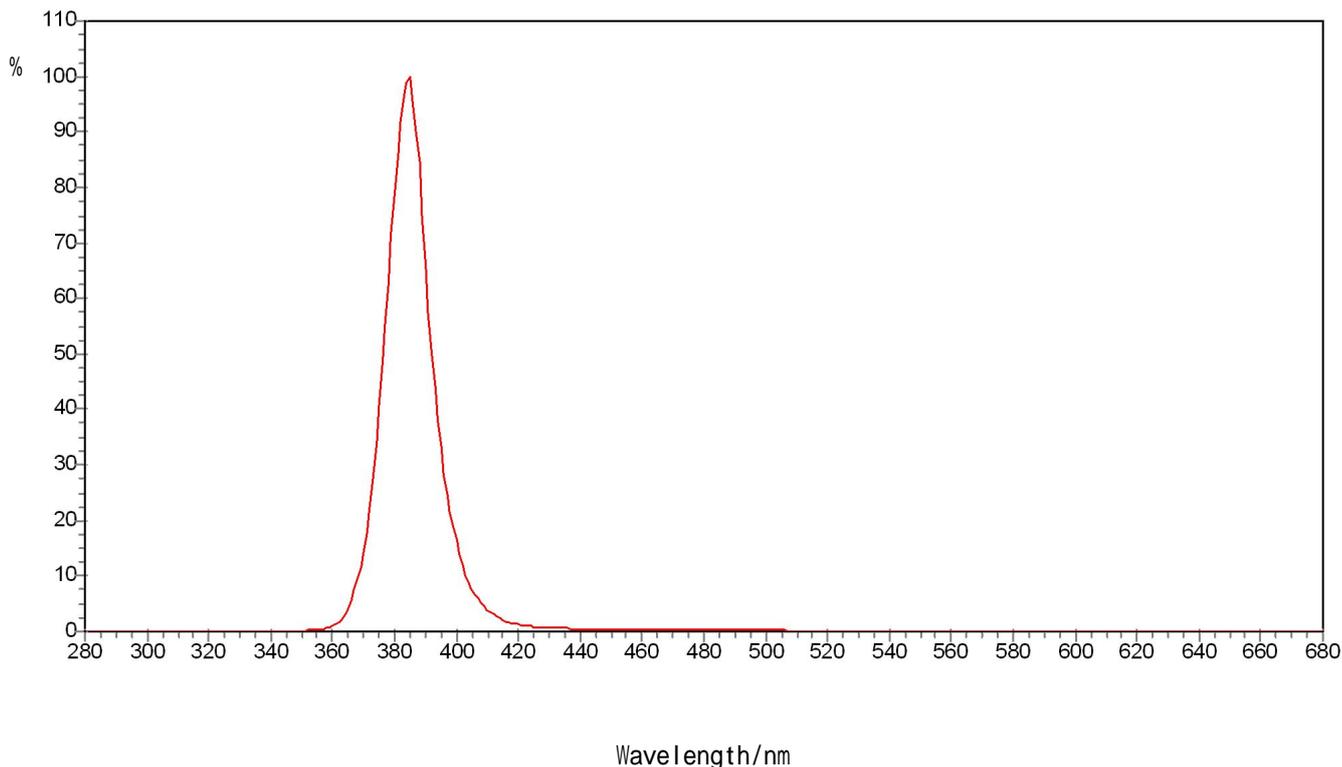

Spectrum Parameters

x: 0.1809 y: 0.0914
 u: 0.1938 v: 0.1468
 WD: 460.7 nm WP: 384.3 nm
 HW: 15.8 nm Purity: 80.004
 CCT: 100000 K Ra: 39.9
 SDCM : 127.28 DUV : -0.0979
 Ratio: R%: 7.6 G%: 0.6 B%: 91.8
 Kred 5.09% Kgreen 71.78% Kblue 23.12%
 R1: 54.6 R2: 85.3 R3: 26.8
 R4: 17.4 R5: 53.1 R6: 9.4
 R7: 56.8 R8: 15.6 R9: -76.1
 R10: 47.8 R11: 20.9 R12: -44.4
 R13: 56.4 R14: 58.8 R15: 58.0

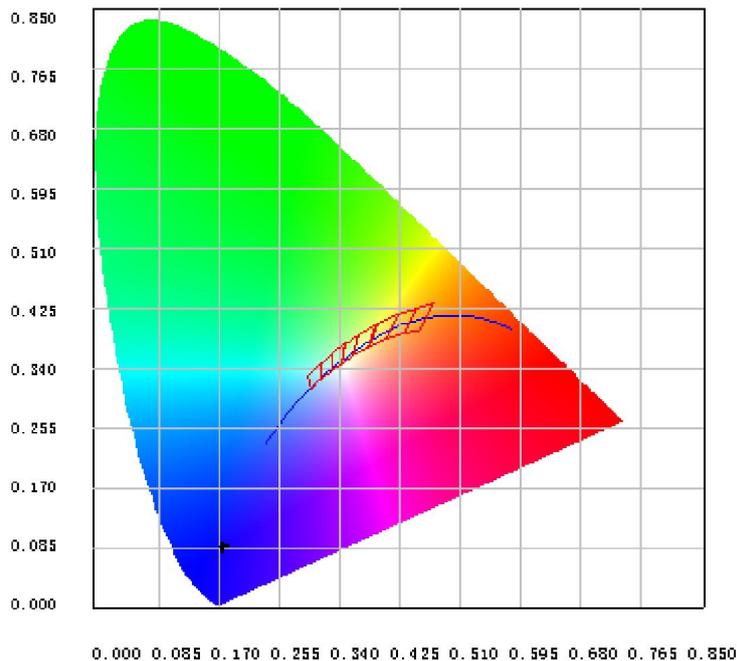

Electrical parameters

Flux: 13.333 lm E: 12.638 lm/w P: 362.42 mw
 I: 315.0 mA V: 3.35 V P: 1.055 w PF:

Memo:

Product Mode: 1

Item No: 17

Tester: Y

Date: 2025-03-22 11:14

Temperature: 24 ()

Humidity: 60 (%)

Manufacturer: ZVISION

organization: 杭州中为光电