


Spectrum Parameters

x:	0.1681	y:	0.0127		
u:	0.2388	v:	0.0270		
WD:	436.1 nm	WP:	421.6 nm		
HW:	22.4 nm	Purity:	98.908		
CCT:	100000 K	Ra:	-65.6		
SDCM :	166.73	DUV :	-0.0630		
Ratio :	R%: 0.1	G%: 0.5	B%: 99.4		
Kred	1.61%	Kgreen	26.64%	Kblue	71.75%
R1:	9.6	R2:	-35.8	R3:	-183.9
R4:	-145.2	R5:	14.3	R6:	-38.1
R7:	-75.9	R8:	-70.2	R9:	-227.7
R10:	-245.1	R11:	-155.1	R12:	-124.4
R13:	9.9	R14:	-45.2	R15:	46.0

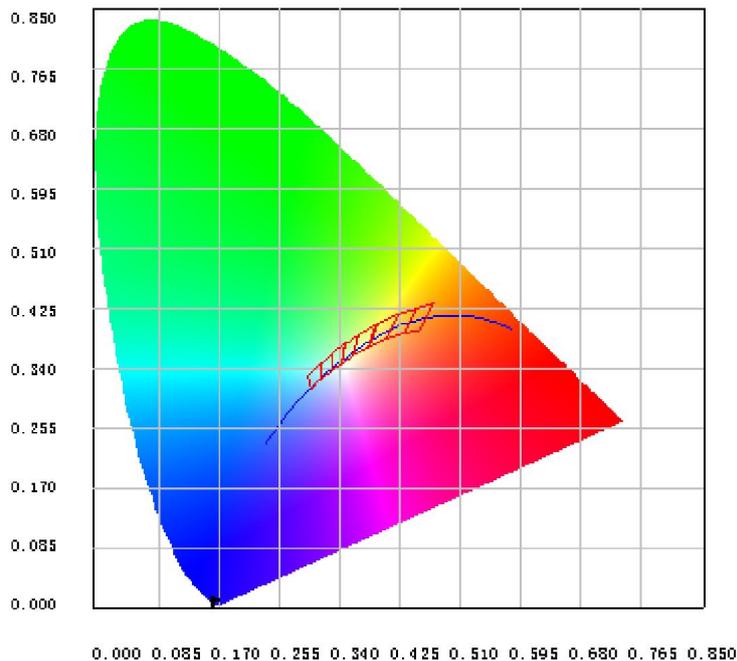


Electrical parameters

Flux:	24.452 lm	E:	10.274 lm/w	P:	707.20 mw	
I:	700.0 mA	V:	3.40 V	P:	2.380 w	PF:


Memo:

Product Mode:	1	Item No:	6
Tester:	Y	Date:	2025-04-29 10:47
Temperature:	24 ()	Humidity:	60 (%)
Manufacturer:	ZVISION	organization:	杭州中为光电

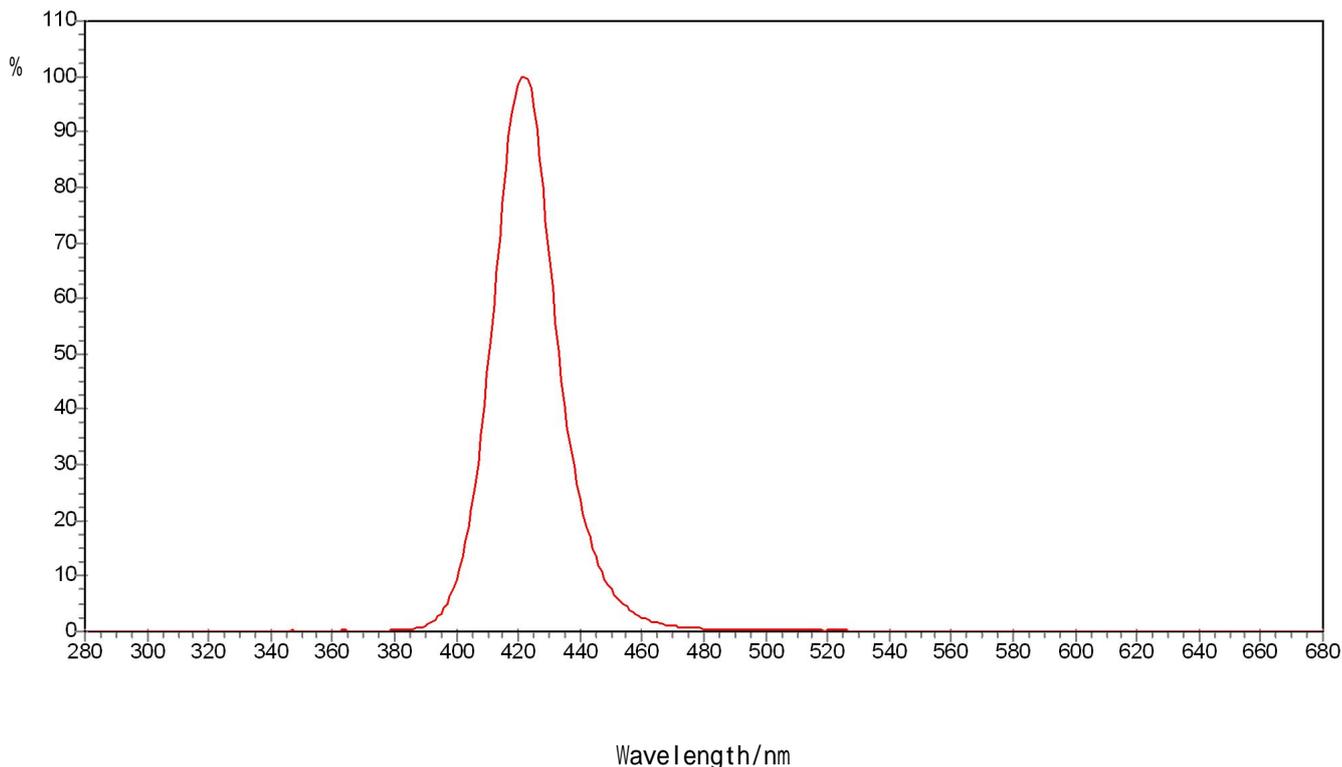

Spectrum Parameters

x:	0.1683	y:	0.0129		
u:	0.2388	v:	0.0274		
WD:	436.1 nm	WP:	421.6 nm		
HW:	22.4 nm	Purity:	98.830		
CCT:	100000 K	Ra:	-64.5		
SDCM:	166.61	DUV:	-0.0628		
Ratio:	R%: 0.2	G%: 0.5	B%: 99.3		
Kred	2.08%	Kgreen	27.61%	Kblue	70.31%
R1:	15.6	R2:	-37.0	R3:	-185.8
R4:	-144.1	R5:	18.1	R6:	-37.2
R7:	-76.6	R8:	-68.8	R9:	-201.6
R10:	-252.7	R11:	-152.8	R12:	-122.4
R13:	13.6	R14:	-45.8	R15:	50.9

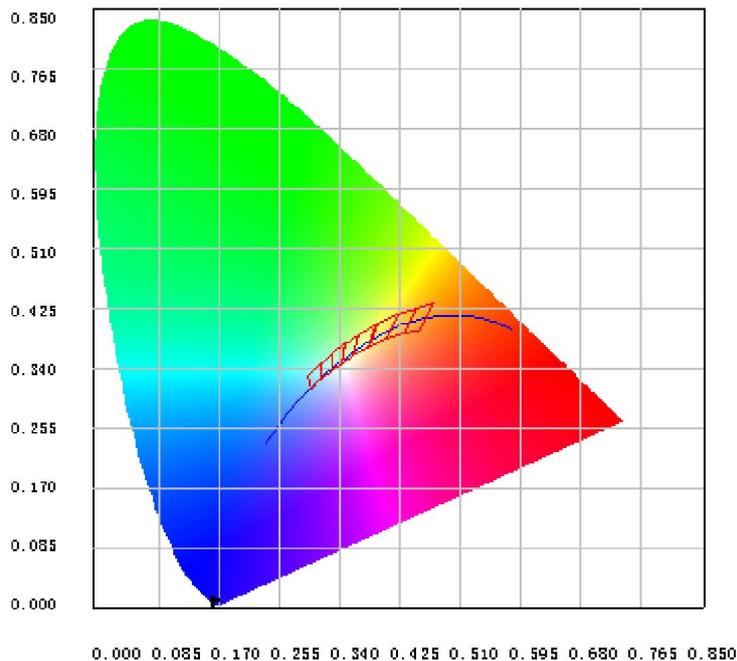

Electrical parameters

Flux:	24.500 lm	E:	10.264 lm/w	P:	709.42 mw		
I:	700.0 mA	V:	3.41 V	P:	2.387 w	PF:	

Memo:

Product Mode:	1	Item No:	7
Tester:	Y	Date:	2025-04-29 10:47
Temperature:	24 ()	Humidity:	60 (%)
Manufacturer:	ZVISION	organization:	杭州中为光电