


Spectrum Parameters

x: 0.1658 y: 0.0135
 u: 0.2343 v: 0.0286
 WD: 440.1 nm WP: 431.2 nm
 HW: 17.2 nm Purity: 99.194
 CCT: 100000 K Ra: -65.3
 SDCM: 143.11 DUV: -0.0673
 Ratio: R%: 0.1 G%: 0.5 B%: 99.4
 Kred 1.27% Kgreen 18.67% Kblue 80.06%
 R1: 4.8 R2: -43.0 R3: -179.5
 R4: -132.7 R5: 13.4 R6: -47.7
 R7: -74.4 R8: -63.1 R9: -240.9
 R10: -245.8 R11: -147.7 R12: -124.4
 R13: -5.6 R14: -43.7 R15: 30.0

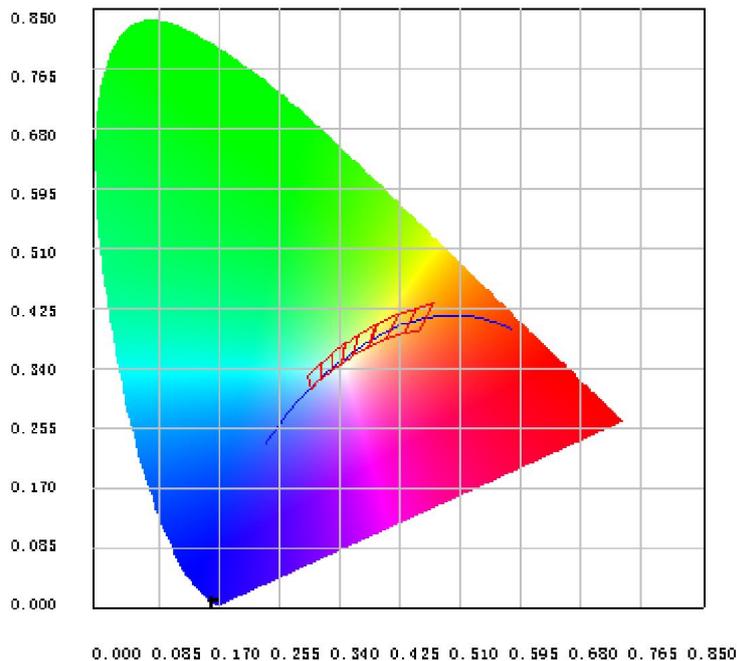


Electrical parameters

Flux: 39.686 lm E: 8.831 lm/w P: 1270.29 mw
 I: 700.0 mA V: 6.42 V P: 4.494 w PF:


Memo:

Product Mode: 1	Item No: 1
Tester: Y	Date: 2025-01-13 17:23
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电

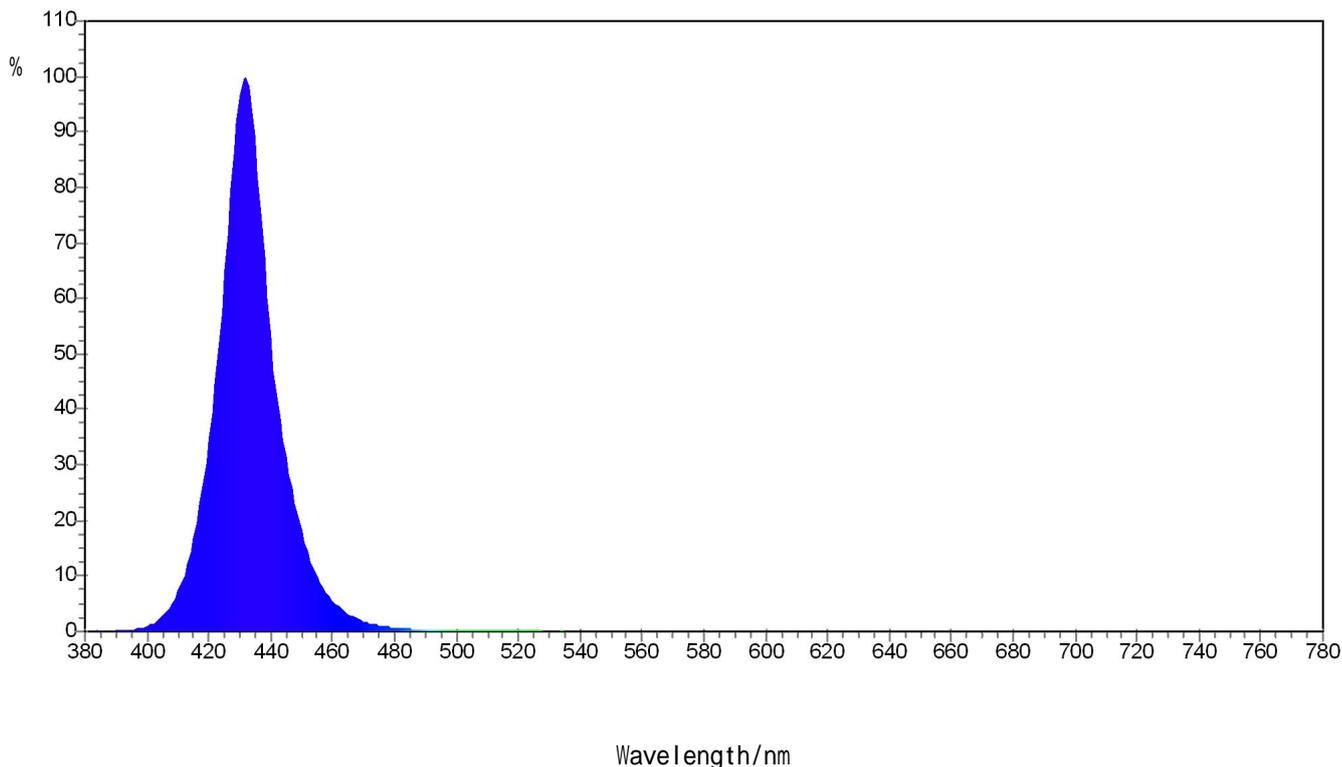

Spectrum Parameters

x: 0.1659 y: 0.0143
 u: 0.2337 v: 0.0302
 WD: 440.3 nm WP: 431.7 nm
 HW: 17.7 nm Purity: 98.981
 CCT: 100000 K Ra: -63.3
 SDCM : 142.81 DUV : -0.0677
 Ratio : R%: 0.3 G%: 0.6 B%: 99.1
 Kred 1.94% Kgreen 20.90% Kblue 77.16%
 R1: 14.0 R2: -42.0 R3: -183.7
 R4: -133.0 R5: 19.6 R6: -43.8
 R7: -75.2 R8: -62.4 R9: -205.3
 R10: -254.3 R11: -145.8 R12: -118.9
 R13: 2.9 R14: -44.9 R15: 39.0

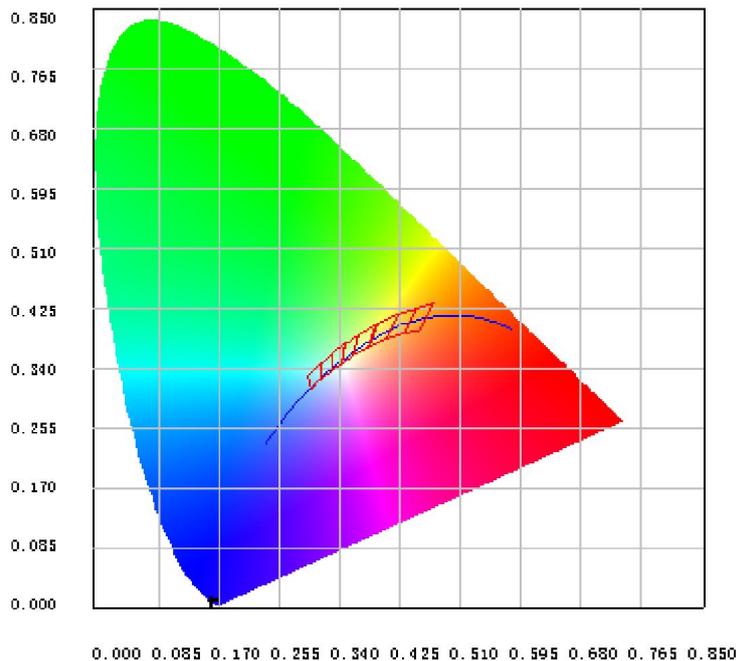

Electrical parameters

Flux: 40.663 lm E: 8.965 lm/w P: 1279.04 mw
 I: 700.0 mA V: 6.48 V P: 4.536 w PF:

Memo:

Product Mode: 1	Item No: 2
Tester: Y	Date: 2025-01-13 17:23
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电