


Spectrum Parameters

x: 0.3806 y: 0.6028
 u: 0.1607 v: 0.3818
 WD: 561.4 nm WP: 555.0 nm
 HW: 40.8 nm Purity: 0.956
 CCT: 4772 K Ra: 6.7
 SDCM : 146.11 DUV : 0.0775
 Ratio: R%: 6.1 G%: 91.8 B%: 2.1
 Kred 2.01% Kgreen 97.82% Kblue 0.17%
 R1: -21.8 R2: 24.2 R3: 41.2
 R4: -25.0 R5: -6.4 R6: 13.6
 R7: 54.7 R8: -26.7 R9: -340.3
 R10: -55.4 R11: -7.9 R12: -35.8
 R13: -15.9 R14: 68.4 R15: -33.7

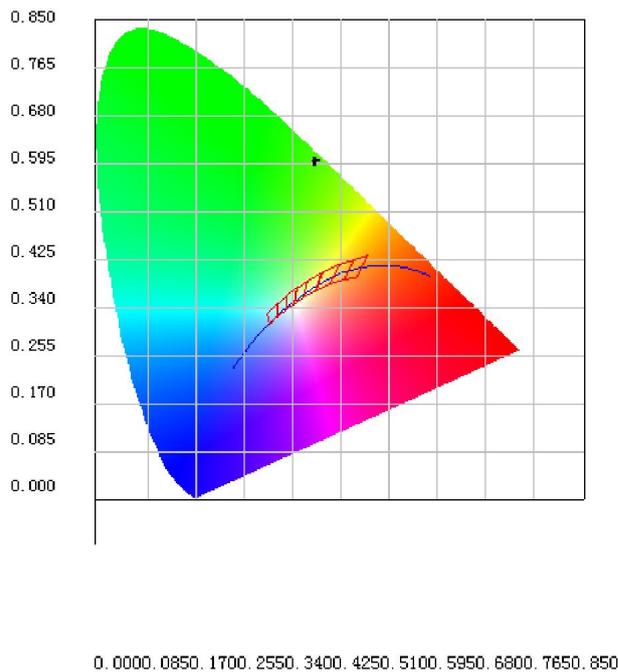

Electrical parameters

Flux: 7706.050 lm E: 77.590 lm/w P: 16595.36 mw
 I: 3498.7 mA V: 28.39 V P: 99.318 w PF:

Memo:

7

Product Mode: 1

Item No: 4

Tester: Y


Date: 2025-05-26 08:36

Temperature: 24 ()

Humidity: 60 (%)


Manufacturer: ZVISION

organization: 杭州中为光电

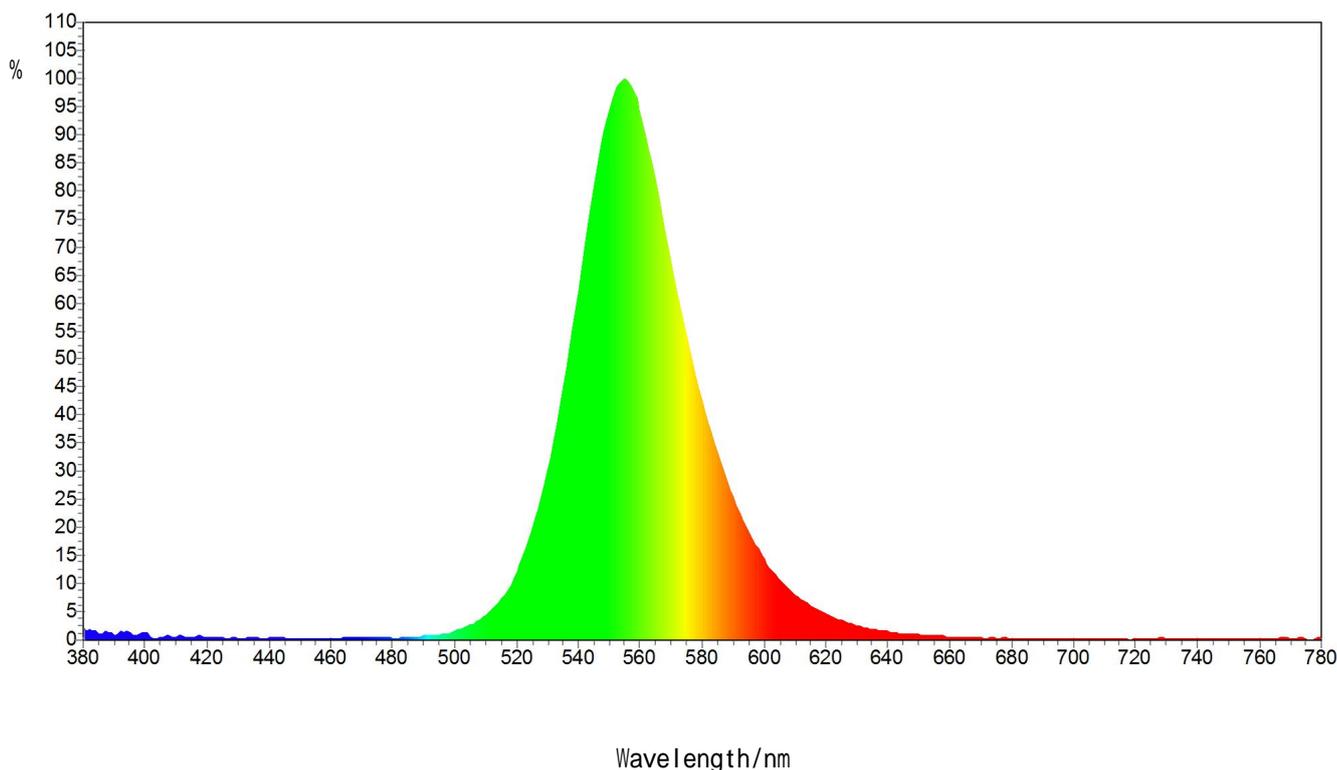

Spectrum Parameters

x: 0.3848 y: 0.6001
 u: 0.1632 v: 0.3818
 WD: 561.9 nm WP: 555.7 nm
 HW: 40.4 nm Purity: 0.961
 CCT: 4708 K Ra: 4.9
 SDCM : 143.08 DUV : 0.0757
 Ratio : R%: 6.2 G%: 92.0 B%: 1.8
 Kred 2.10% Kgreen 97.75% Kblue 0.15%
 R1: -21.6 R2: 24.6 R3: 38.9
 R4: -25.5 R5: -5.4 R6: 12.6
 R7: 45.7 R8: -29.9 R9: -339.4
 R10: -56.0 R11: -9.2 R12: -36.1
 R13: -15.3 R14: 67.6 R15: -33.5

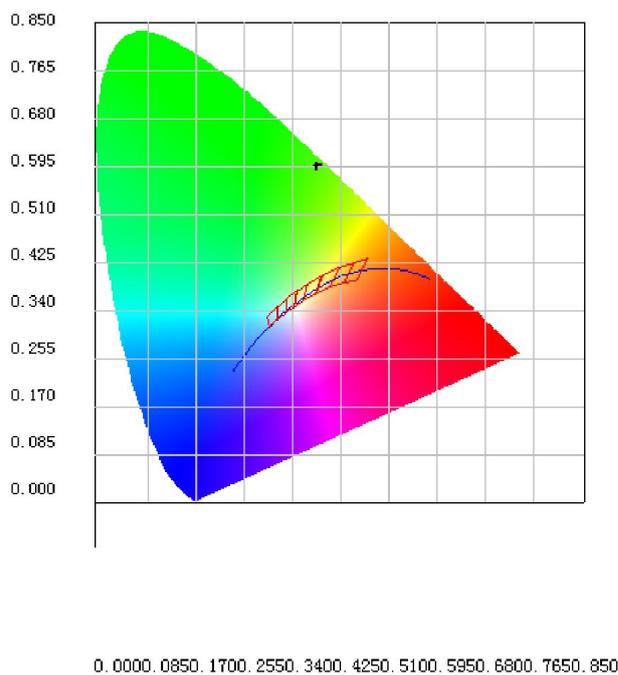

Electrical parameters

Flux: 7625.484 lm E: 76.385 lm/w P: 16208.74 mw
 I: 3498.6 mA V: 28.53 V P: 99.829 w PF:

Memo:

7

Product Mode: 1

Item No: 5

Tester: Y

Date: 2025-05-26 08:36

Temperature: 24 ()

Humidity: 60 (%)

Manufacturer: ZVISION

organization: 杭州中为光电