


Spectrum Parameters

x: 0.3257 y: 0.6566
 u: 0.1274 v: 0.3852
 WD: 553.3 nm WP: 544.7 nm
 HW: 37.9 nm Purity: 95.972
 CCT: 5629 K Ra: -21.0
 SDCM: 207.03 DUV: 0.1038
 Ratio: R%: 2.9 G%: 96.5 B%: 0.6
 Kred 1.04% Kgreen 98.76% Kblue 0.20%
 R1: -26.2 R2: 1.9 R3: -18.2
 R4: -60.3 R5: -8.5 R6: -8.0
 R7: -6.1 R8: -42.5 R9: -356.5
 R10: -97.9 R11: -96.0 R12: -43.2
 R13: -22.9 R14: 37.8 R15: -34.2

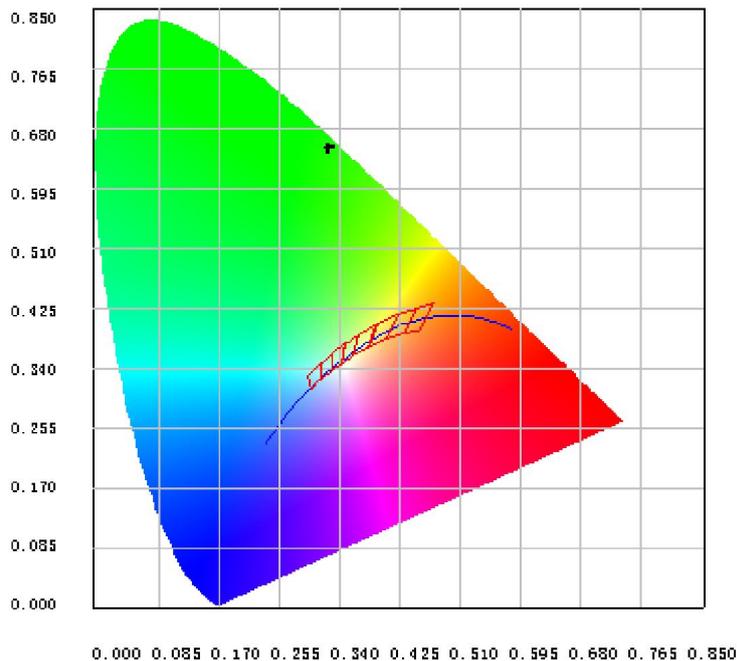


Electrical parameters

Flux: 80.604 lm E: 87.234 lm/w P: 86.93 mw
 I: 350.0 mA V: 2.64 V P: 0.924 w PF:


Memo:

Product Mode: 1	Item No: 3
Tester: Y	Date: 2025-04-16 15:50
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电

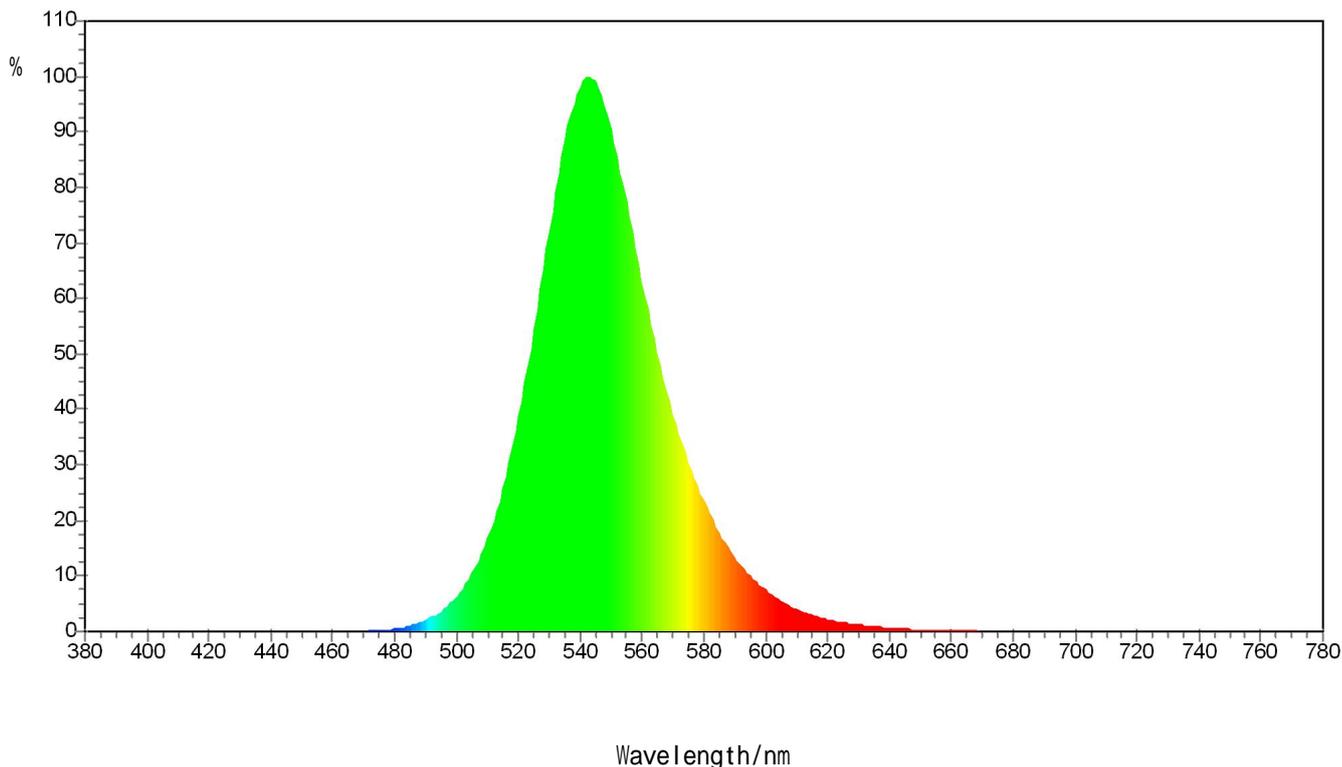

Spectrum Parameters

x: 0.3140 y: 0.6618
 u: 0.1218 v: 0.3850
 WD: 551.6 nm WP: 542.8 nm
 HW: 41.5 nm Purity: 94.214
 CCT: 5794 K Ra: -17.4
 SDCM : 217.29 DUV : 0.1080
 Ratio : R%: 2.8 G%: 96.0 B%: 1.2
 Kred 1.04% Kgreen 98.52% Kblue 0.44%
 R1: -24.4 R2: 4.6 R3: -9.7
 R4: -58.7 R5: -6.8 R6: -2.4
 R7: -2.5 R8: -39.3 R9: -351.8
 R10: -88.0 R11: -93.7 R12: -32.0
 R13: -21.5 R14: 43.5 R15: -33.1

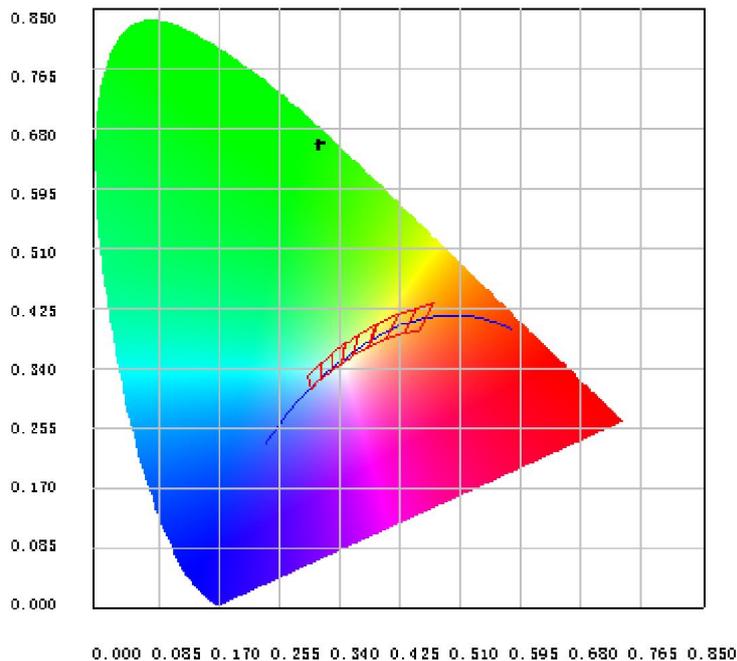

Electrical parameters

Flux: 113.661 lm E: 54.305 lm/w P: 135.66 mw
 I: 700.0 mA V: 2.99 V P: 2.093 w PF:

Memo:

Product Mode: 1	Item No: 4
Tester: Y	Date: 2025-04-16 15:50
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电