


PRODUCT SPECIFICATION

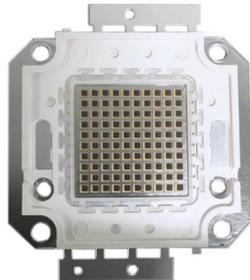

Part No.: WL-P100EP4242IR140-780
High Power LED


Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Cautions	P6


1.Product Features

- High Brightness IR LED Oval Package
- Viewing Angle 140 Degree
- Transparent Silicone
- Chip Material: AlGaAs
- RoHS Compliant


2.Dimensions

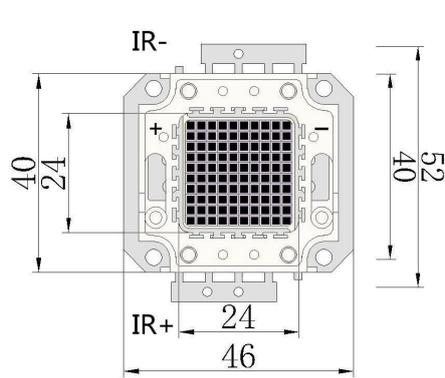


Top view

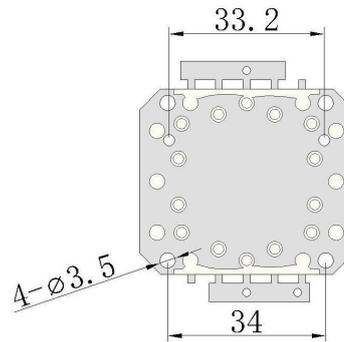


Bottom view

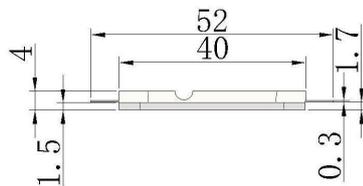

Side view

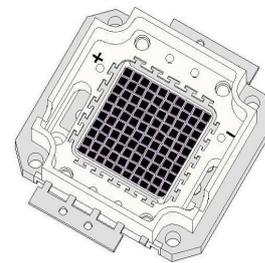

Perspective view

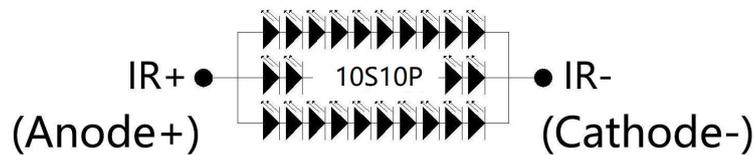

Circuit diagram

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	3500	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	3800	mA
Reverse Voltage	VR	22	V
Power Dissipation	PD	70	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

4. Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	IR	18	19	20	V	IF=3500mA
Radiant Power	PO	IR	15000	16000	18000	mW	IF=3500mA
Peak Wavelength	WP	IR	780	782.5	785	nm	IF=3500mA
Reverse Current	IR		0		10	μA	VR=13V
Viewing Angle	2θ1/2				140	deg	IF=3500mA
Recommend Forward Current	IF(rec)	IR			3500	mA	


Notes:

Measurement tolerance of forward voltage ±0.1V


5. Optical Character Curves

(25 ° Ambient Temperature Unless Otherwise Noted)


Forward Current vs. Forward Voltage
Tc=25C

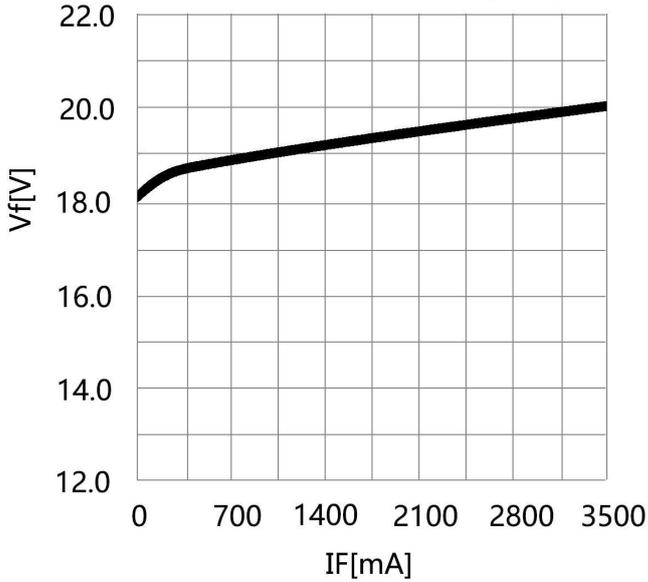


Forward Current vs. Relative Luminous Flux
Tc=25C

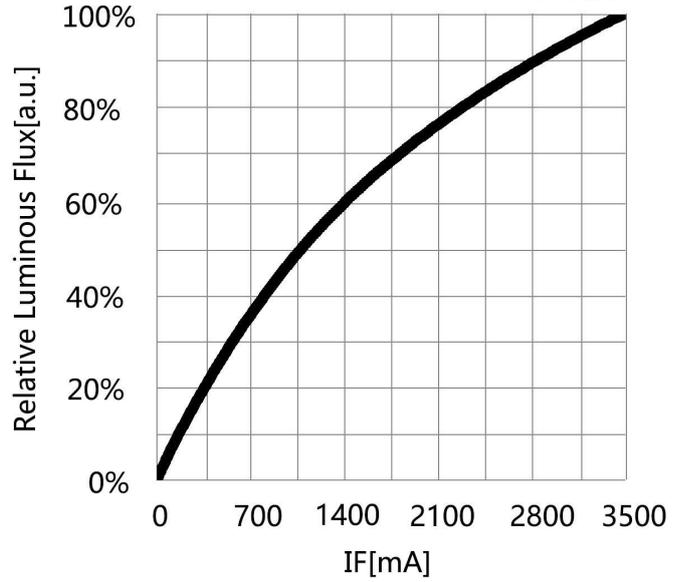

Case Temperature vs. Forward Voltage
If=3500mA

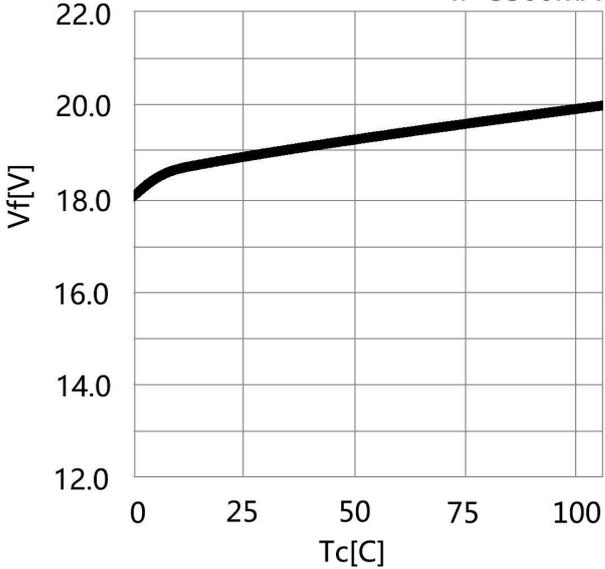


Case Temperature vs. Relative Luminous Flux
If=3500mA

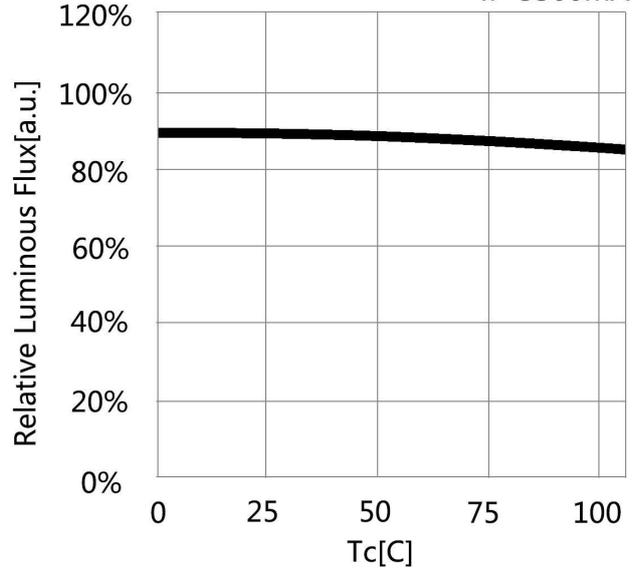

6. Spectrum Curves


IF=3500mA

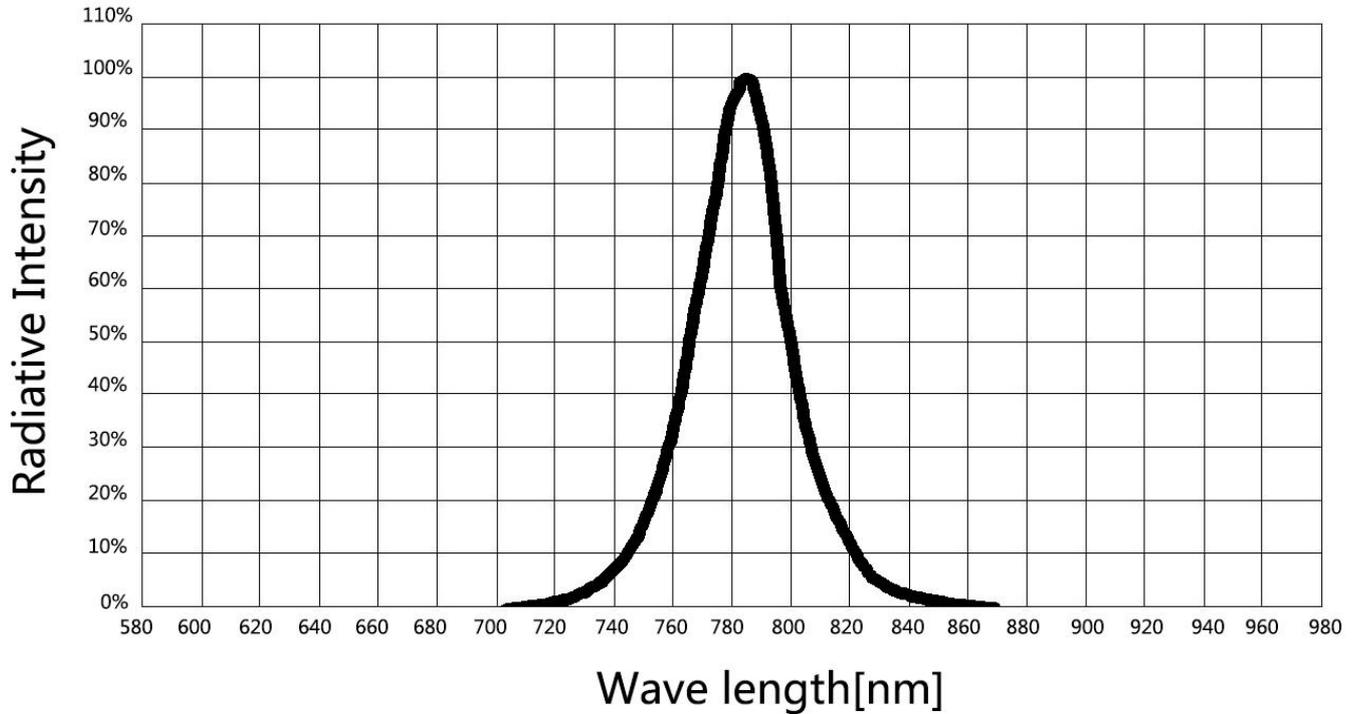

7. Viewing Angle Curves

Radiation Characteristic

IF=3500mA

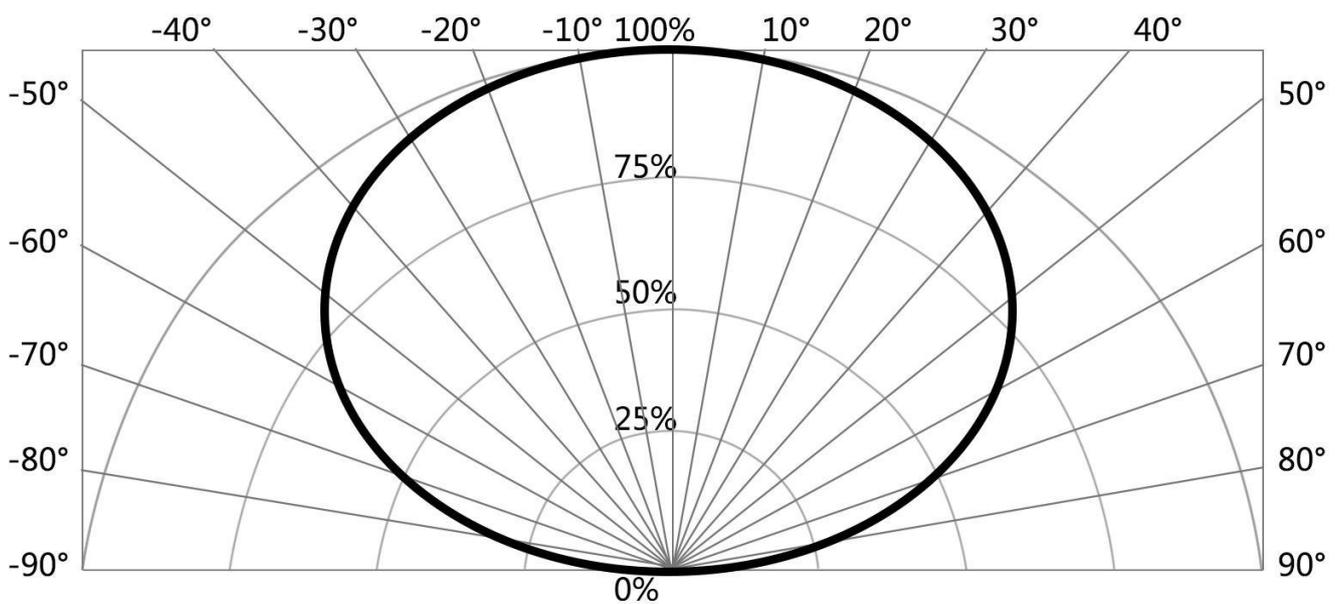

8.Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

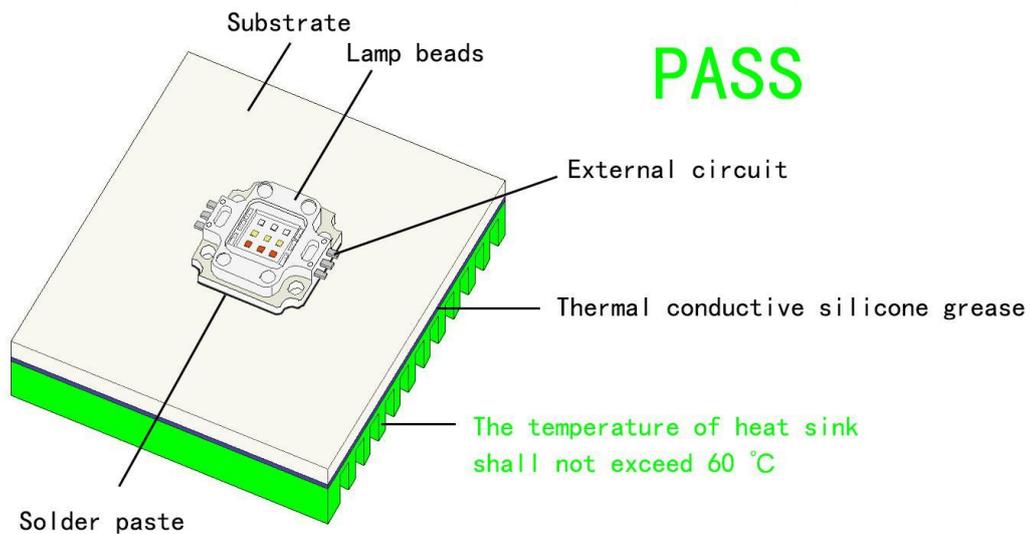

OK

