


# PRODUCT SPECIFICATION



**Part No.: WL-1P3030EP120RB-440**  
**SMD High Power LED**


## Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8


## 1.Product Features

- High Brightness BLUE LED
- Plane Package
- Viewing Angle 120 Degree
- Chip Material: AlGaInP
- RoHS Compliant

## 2.Dimensions

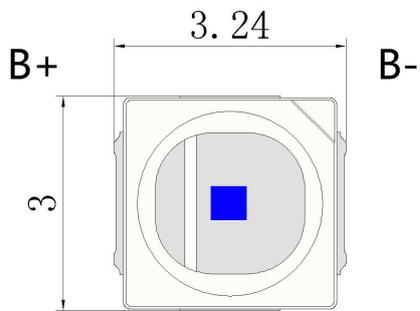


Top view

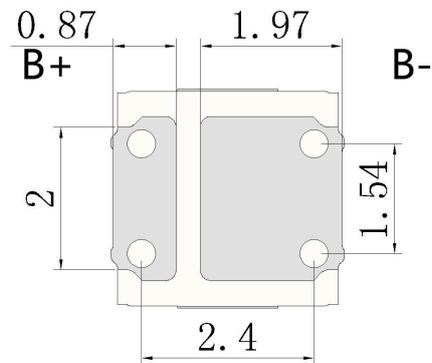

Bottom view



Side view

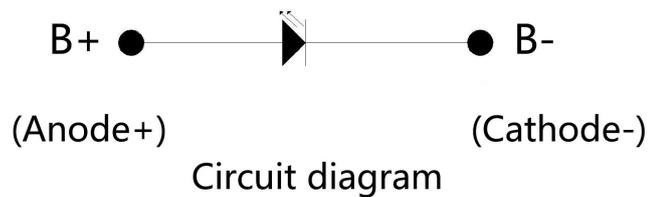

### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.

### 3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	350	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	500	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	1	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

### 4. Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	B	3.0	3.2	3.4	V	IF=350mA
Luminous Flux	Φ	B	10		15	lm	IF=350mA
Peak Wavelength	WIP	B	440	443	445	nm	IF=350mA
Reverse Current	IR		0		10	μA	VR=5V
Viewing Angle	2θ1/2				120	deg	IF=350mA
Recommend Forward Current	IF(rec)	B			350	mA	

#### Notes:


Measurement tolerance of forward voltage ±0.1V

## 5. Optical Character Curves

( 25 ° Ambient Temperature Unless Otherwise Noted )


Forward Current vs. Forward Voltage

T<sub>c</sub>=25C

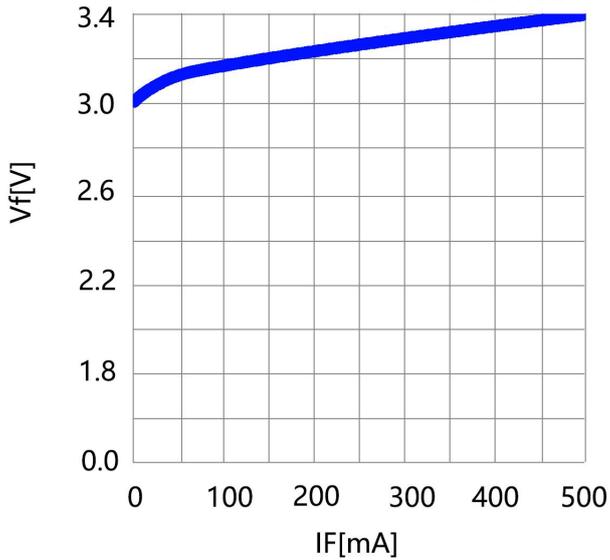


Forward Current vs. Relative Luminous Flux

T<sub>c</sub>=25C

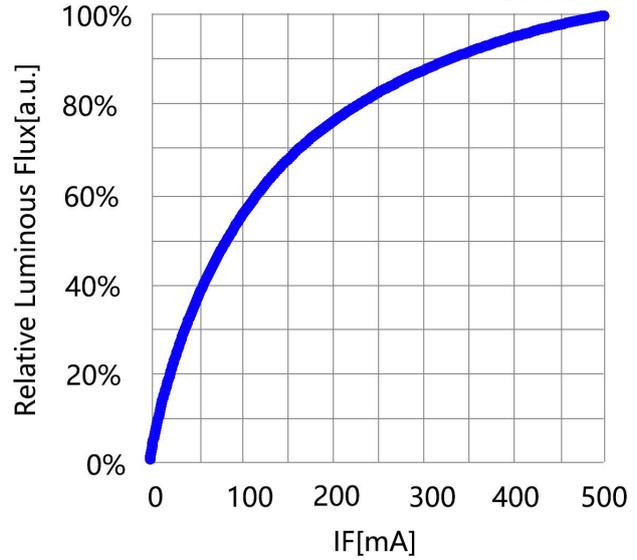


Case Temperature vs. Forward Voltage

I<sub>f</sub>=350mA

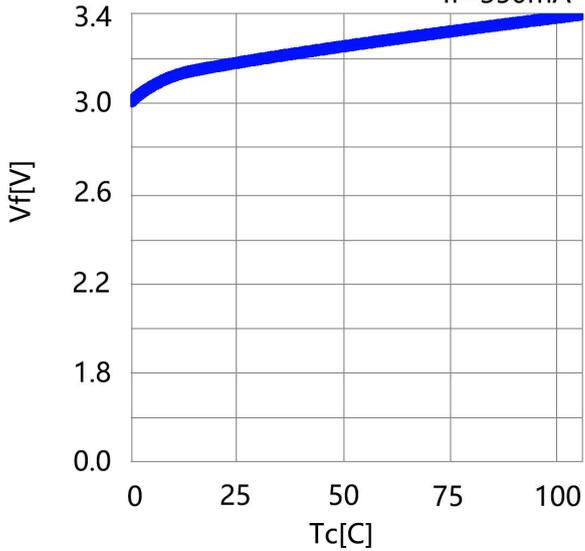


Case Temperature vs. Relative Luminous Flux

I<sub>f</sub>=350mA

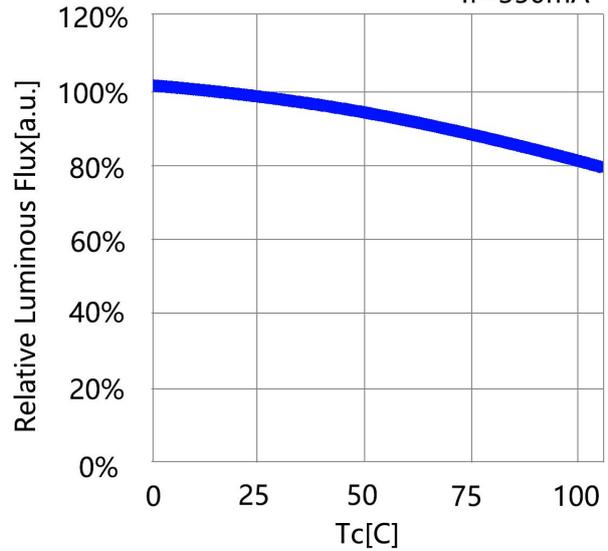

## 6. Spectrum Curves


IF=350mA

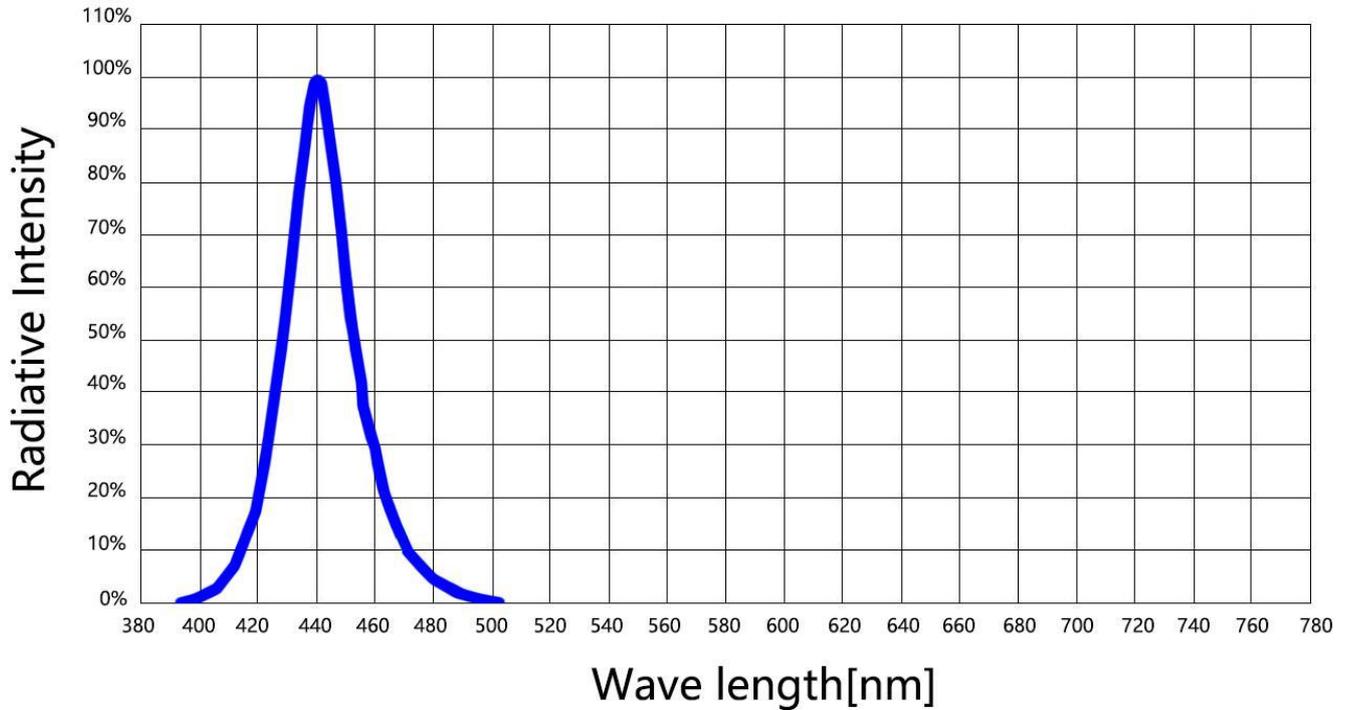

## 7. Viewing Angle Curves


Radiation Characteristic

IF=350mA

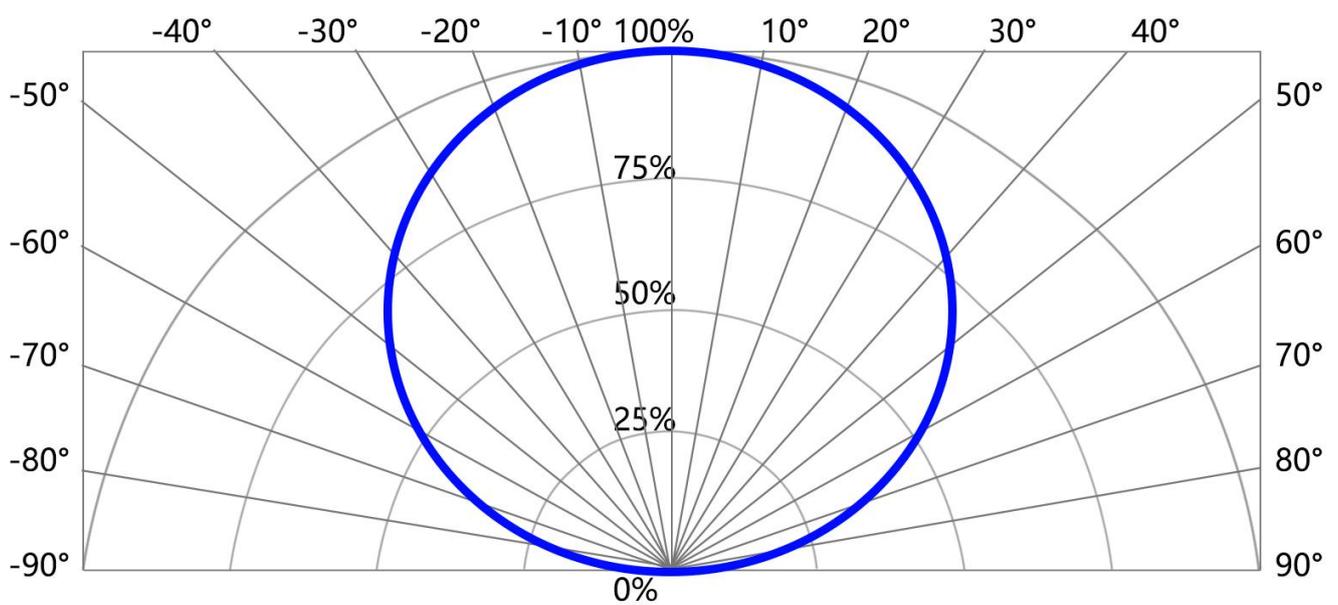

## 8. Tape & Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at 25°C ± 3°C, humidity 50-60%. If unpacked above 1 week, bake at 60 ± 5°C for 10-12 hours before weld.

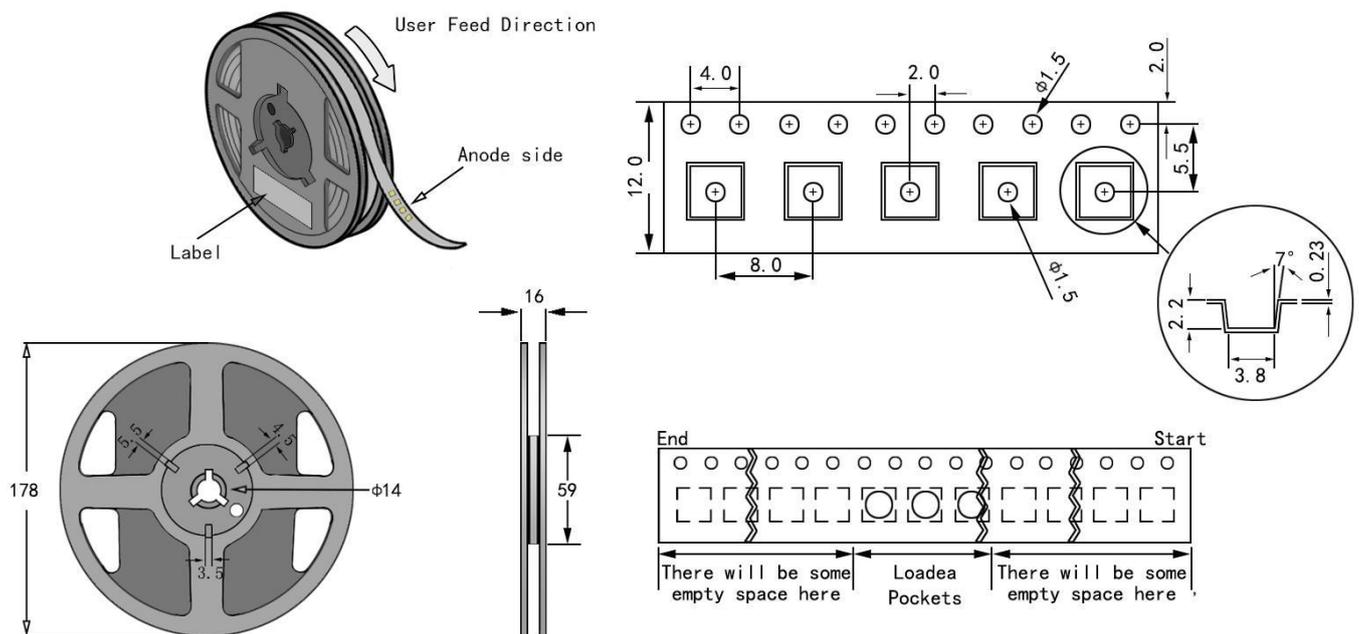


### Notes:

1. QTY: 5000pcs/Reel
2. Tolerance ±0.2mm.
3. Package: P/N

## 9.Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

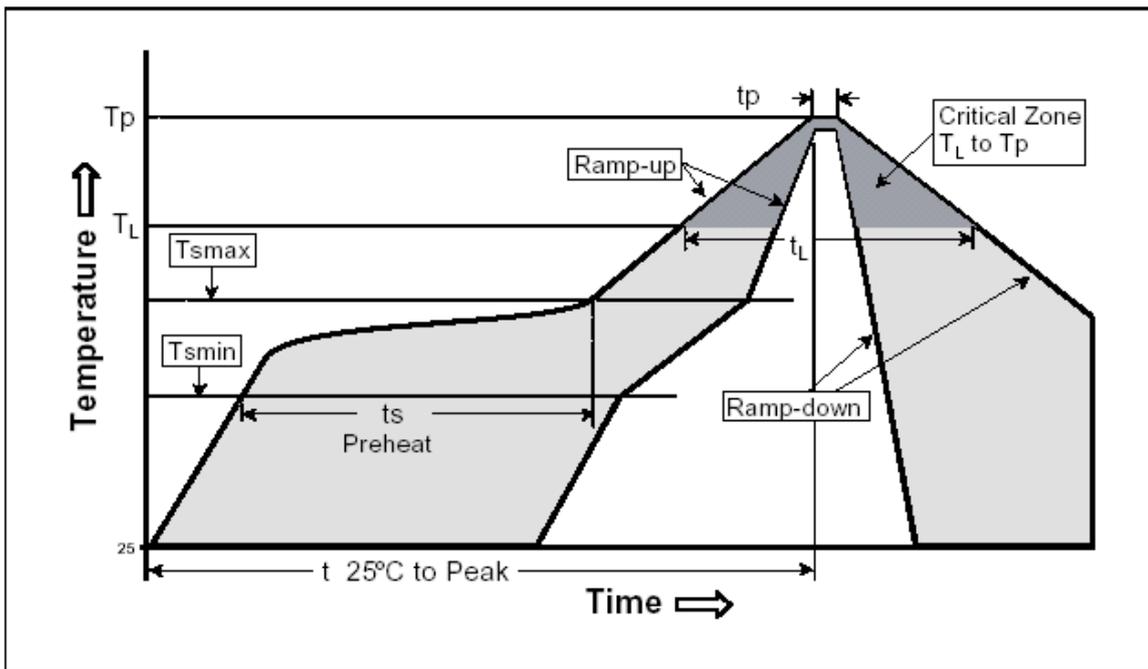

Temperature Curve Character	Lead-free solder
Average heating rate( $T_{smin}$ to $T_p$ )	Top 3 °C / s
Preheating: Minimum temperature ( $T_{smin}$ )	90°C
Preheating: Maximum temperature ( $T_{smax}$ )	200°C
Preheating: Time ( $T_{smin}$ to $T_{smax}$ )	60-180 s
Duration above temperature: Temperature $T_L$	240°C
Duration above temperature: Time $t_L$	60-150 s
Peak/classification temperature ( $T_p$ )	260°C
Time within 5°C of actual peak temperature ( $t_p$ )	20-40 s
Cooling speed	The highest 6 °C / s
Time to reach peak temperature at 25°C	8 minutes Max

## 10. Cautions


### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



### 2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

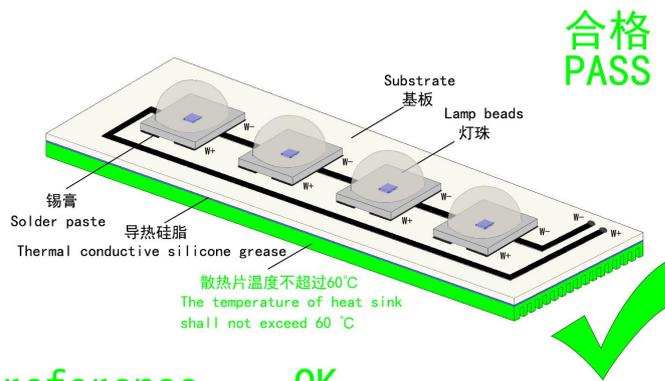

### 3. Installation Conditions

reference OK

- A、 Do not exert any pressure on the LED area during the use of the led beads.such as below:

