


Spectrum Parameters

x: 0.4108 y: 0.5795
 u: 0.1799 v: 0.3807
 WD: 565.6 nm WP: 559.7 nm
 HW: 42.1 nm Purity: 0.975
 CCT: 4292 K Ra: 2.4
 SDCM : 125.36 DUV : 0.0641
 Ratio : R%: 7.8 G%: 91.2 B%: 1.0
 Kred 2.87% Kgreen 97.02% Kblue 0.11%
 R1: -18.5 R2: 23.4 R3: 27.5
 R4: -31.9 R5: -6.9 R6: 13.8
 R7: 45.0 R8: -33.1 R9: -328.7
 R10: -57.8 R11: -20.0 R12: -38.9
 R13: -13.1 R14: 60.5 R15: -32.5

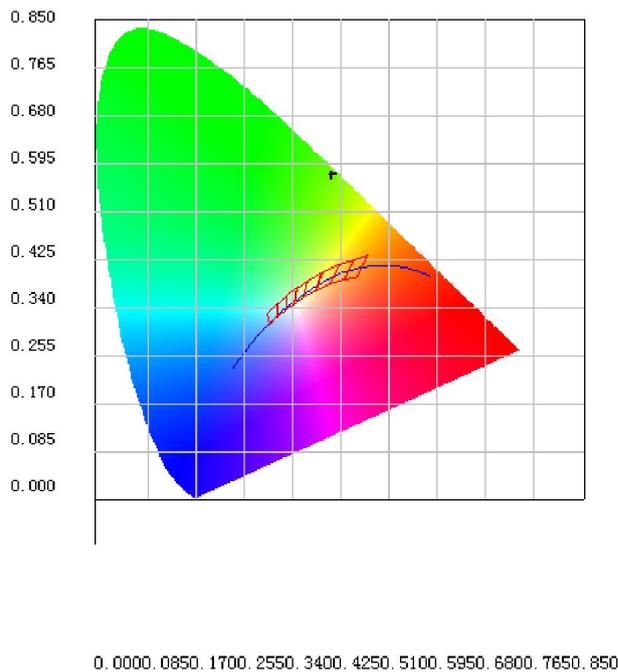


Electrical parameters

Flux: 571.448 lm E: 62.283 lm/w P: 1149.80 mw
 I: 1049.6 mA V: 8.74 V P: 9.175 w PF:

Memo:


7

Product Mode: 1	Item No: 1
Tester: Y	Date: 2025-05-16 16:17
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电

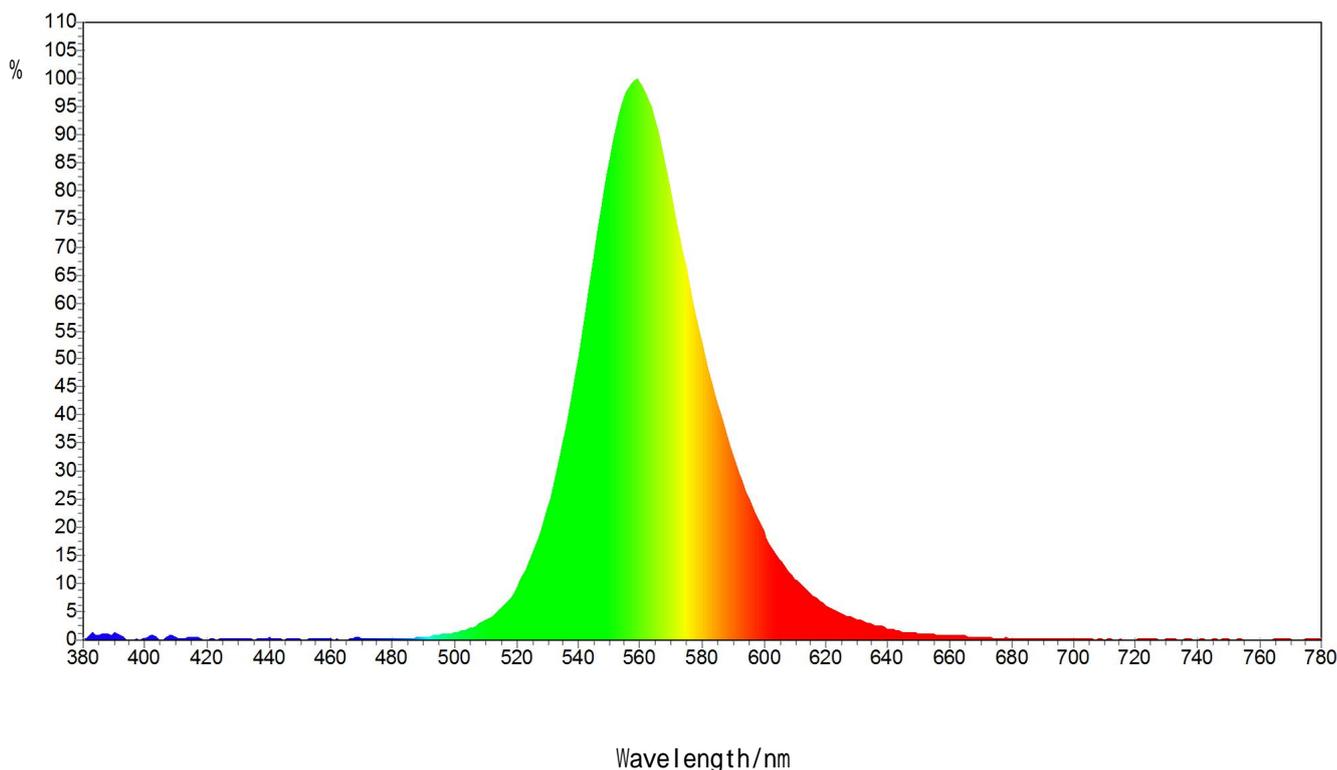

Spectrum Parameters

x: 0.4078 y: 0.5820
 u: 0.1779 v: 0.3809
 WD: 565.1 nm WP: 559.3 nm
 HW: 41.8 nm Purity: 0.974
 CCT: 4341 K Ra: 0.7
 SDCM : 127.12 DUV : 0.0655
 Ratio: R%: 7.6 G%: 91.4 B%: 1.0
 Kred 2.77% Kgreen 97.12% Kblue 0.12%
 R1: -19.3 R2: 25.4 R3: 30.5
 R4: -27.9 R5: -3.8 R6: 9.5
 R7: 29.2 R8: -38.0 R9: -329.6
 R10: -57.1 R11: -15.7 R12: -39.2
 R13: -12.6 R14: 63.5 R15: -32.3

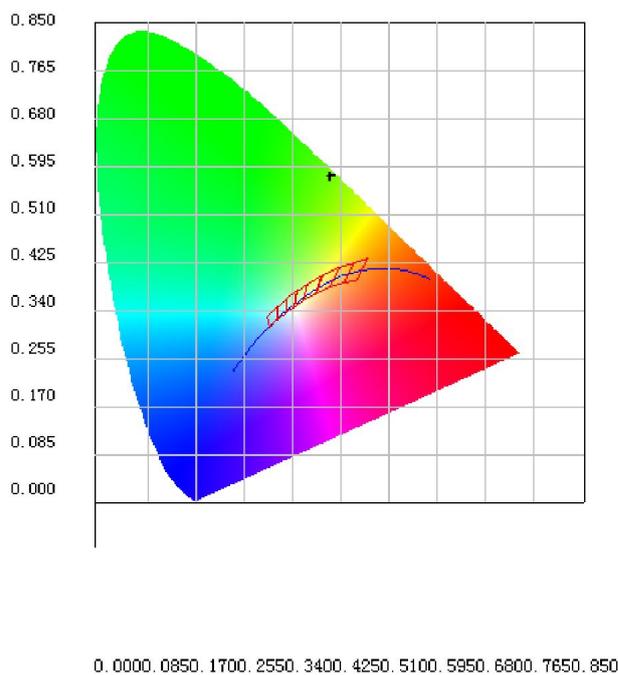

Electrical parameters

Flux: 563.391 lm E: 61.613 lm/w P: 1138.98 mw
 I: 1049.6 mA V: 8.71 V P: 9.144 w PF:

Memo:

7

Product Mode: 1

Item No: 2

Tester: Y

Date: 2025-05-16 16:17

Temperature: 24 ()

Humidity: 60 (%)

Manufacturer: ZVISION

organization: 杭州中为光电