


Spectrum Parameters

x: 0.3973 y: 0.5918
 u: 0.1708 v: 0.3815
 WD: 563.6 nm WP: 557.9 nm
 HW: 41.1 nm Purity: 0.973
 CCT: 4512 K Ra: -0.5
 SDCM: 134.70 DUV: 0.0706
 Ratio: R%: 6.6 G%: 92.5 B%: 0.9
 Kred 2.40% Kgreen 97.49% Kblue 0.11%
 R1: -20.4 R2: 21.1 R3: 22.6
 R4: -34.1 R5: -6.0 R6: 11.7
 R7: 35.9 R8: -34.4 R9: -336.2
 R10: -63.0 R11: -22.2 R12: -37.8
 R13: -14.8 R14: 58.5 R15: -33.6

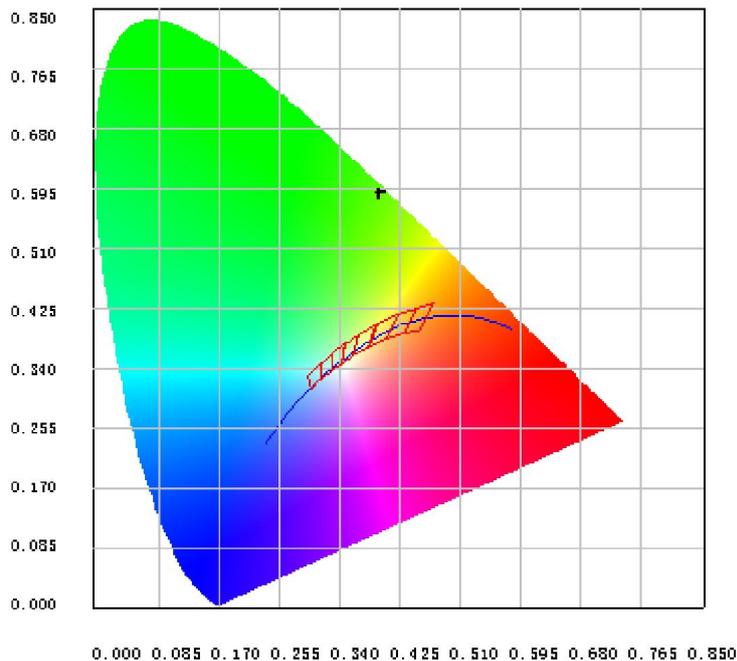


Electrical parameters

Flux: 260.855 lm E: 22.587 lm/w P: 571.52 mw
 I: 1399.6 mA V: 8.25 V P: 11.549 w PF:

Memo:


7

Product Mode: 1	Item No: 2
Tester: Y	Date: 2024-10-17 17:14
Temperature: 24 ()	Humidity: 60 (%)
Manufacturer: ZVISION	organization: 杭州中为光电

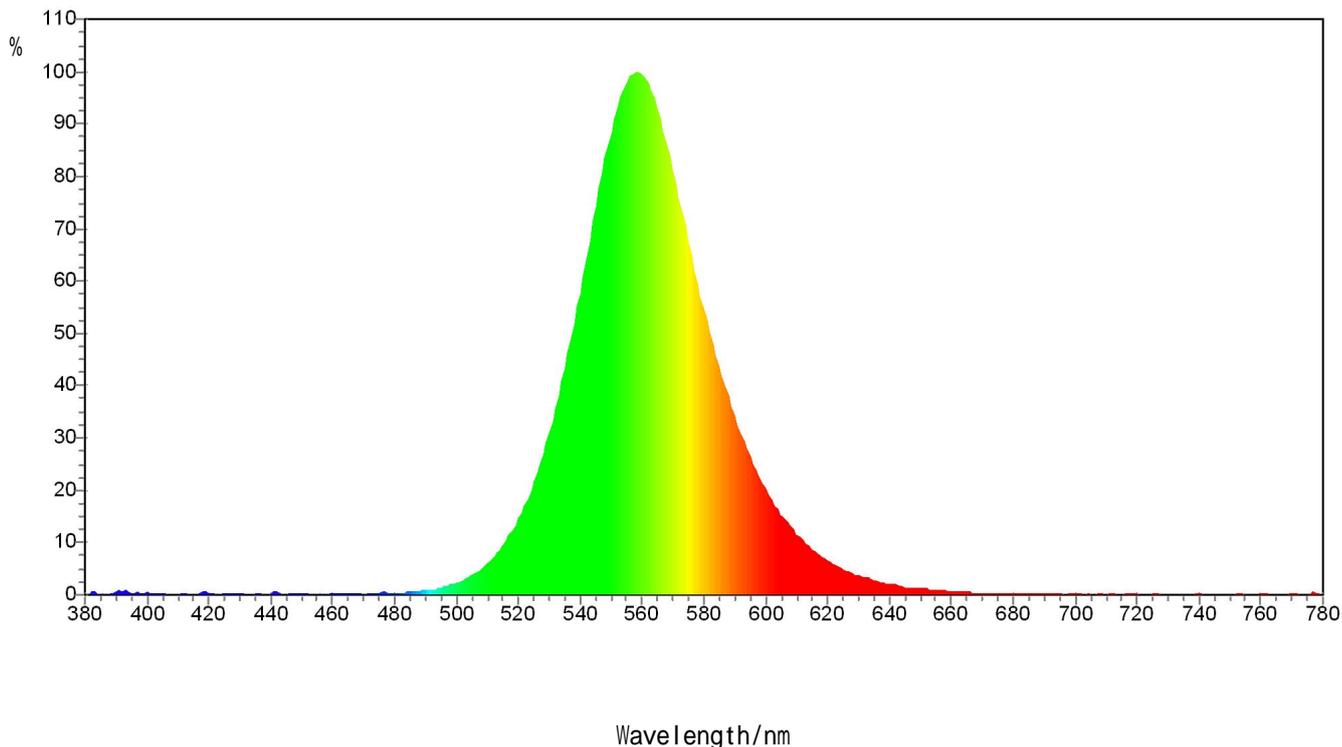

Spectrum Parameters

x: 0.4012 y: 0.5863
 u: 0.1738 v: 0.3810
 WD: 564.3 nm WP: 558.6 nm
 HW: 45.0 nm Purity: 0.968
 CCT: 4444 K Ra: 2.4
 SDCM: 130.64 DUV: 0.0682
 Ratio: R%: 7.5 G%: 91.5 B%: 1.0
 Kred 2.75% Kgreen 97.07% Kblue 0.18%
 R1: -16.7 R2: 24.6 R3: 28.7
 R4: -30.3 R5: -2.7 R6: 14.7
 R7: 34.6 R8: -33.7 R9: -326.0
 R10: -55.6 R11: -19.0 R12: -33.4
 R13: -10.7 R14: 62.6 R15: -31.1

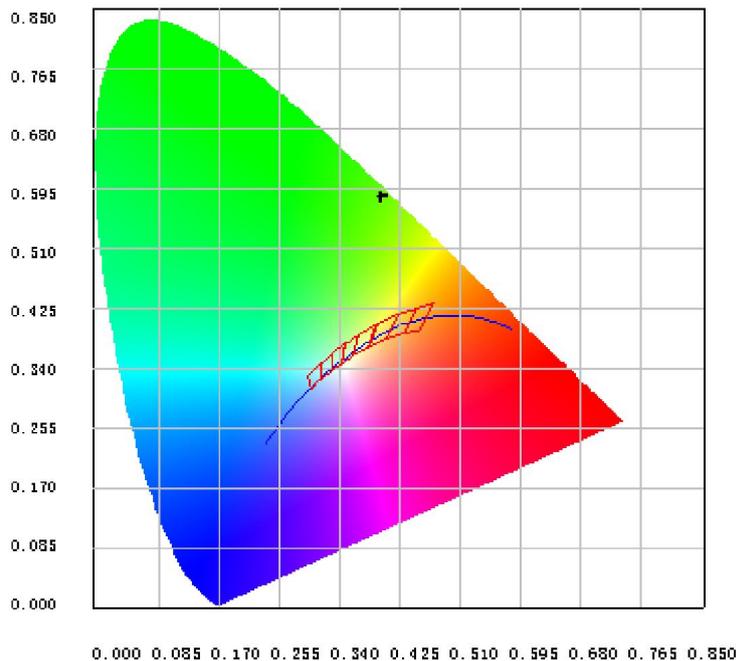

Electrical parameters

Flux: 232.657 lm E: 22.674 lm/w P: 519.65 mw
 I: 1399.7 mA V: 7.33 V P: 10.261 w PF:

Memo:

7

Product Mode: 1

Item No: 3

Tester: Y

Date: 2024-10-17 17:14

Temperature: 24 ()

Humidity: 60 (%)

Manufacturer: ZVISION

organization: 杭州中为光电