


# PRODUCT SPECIFICATION

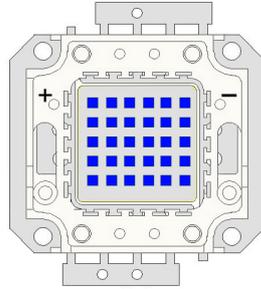

Part No.: WL-P30EP4545CB140-470-5S6P

High Power LED





## Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Cautions	P6

## 1. Product Features

- High Brightness Blue LED Plane
- Package
- Viewing Angle 140 Degree
- Chip Material: AlGaInP
- RoHS Compliant

## 2. Dimensions

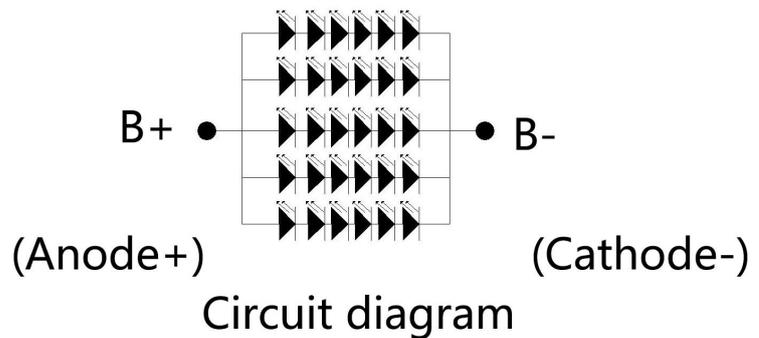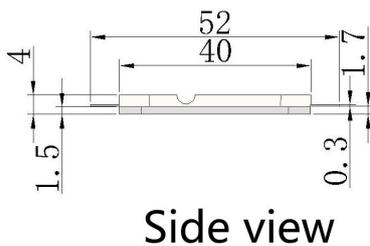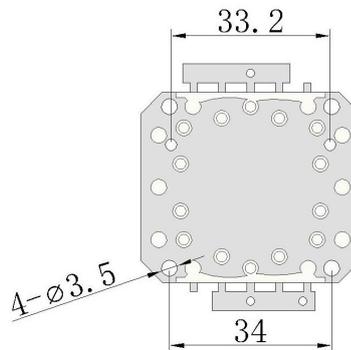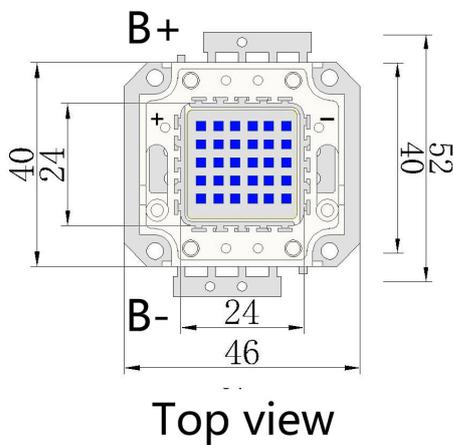

### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.1$ mm unless otherwise noted.

### 3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	1750	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	2000	mA
Reverse Voltage	VR	17	V
Power Dissipation	PD	30	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Soldering iron welding temperature (reflow welding is not allowed)	TSOL	350°C	

### 4. Optical Character @ Ta=25° C





Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	B	17	18	19	V	IF=1750mA
Luminous Flux	Φ	B	900	950	1000	Lm	IF=1750mA
Wavelength	WIP	B	465	470	475	nm	IF=1750mA
Reverse Current	IR		0		10	μA	VR=17V
Viewing Angle	2θ1/2				140	deg	IF=1750mA
Recommend Forward Current	IF(rec)	B			1750	mA	

#### Notes:


Measurement tolerance of forward voltage ±0.1V

## 5. Optical Character Curves

( 25 ° Ambient Temperature Unless Otherwise Noted )

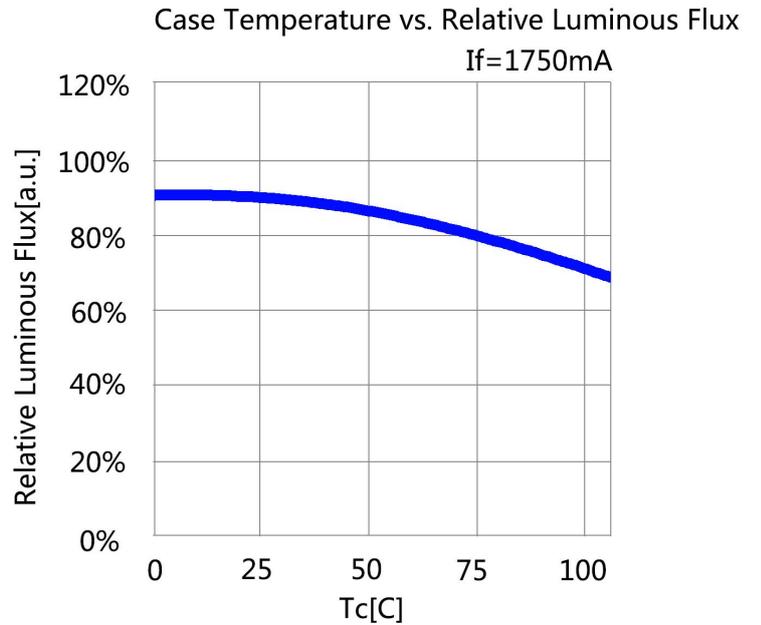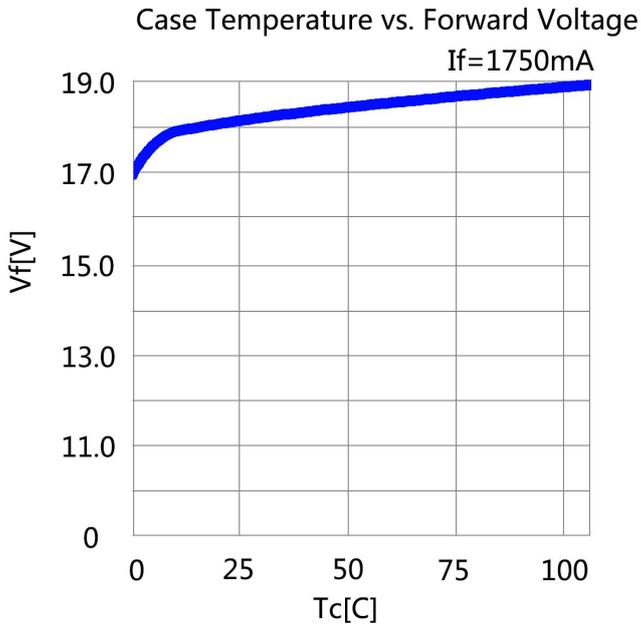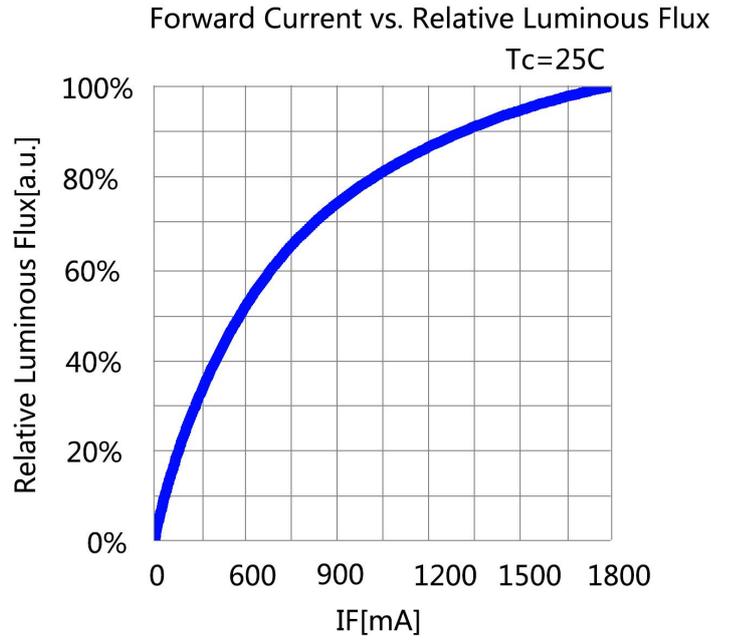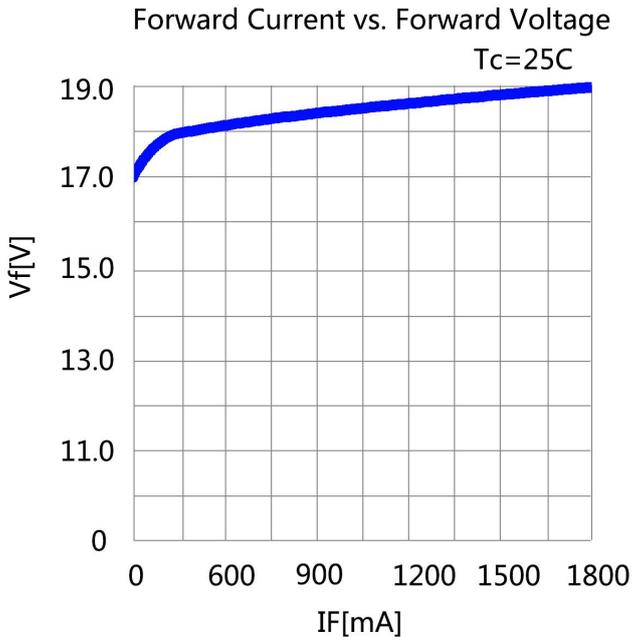


## 6. Spectrum Curves

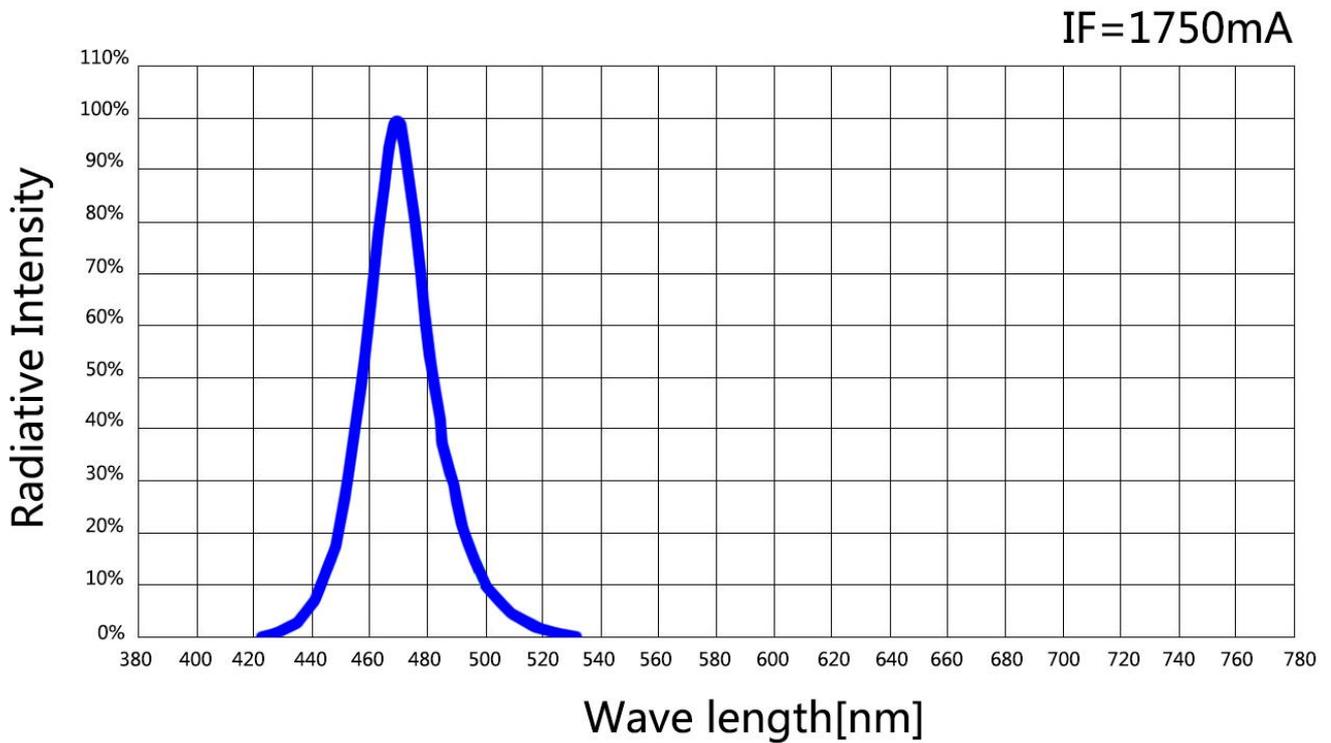

## 7. Viewing Angle Curves

Radiation Characteristic

IF=1750mA

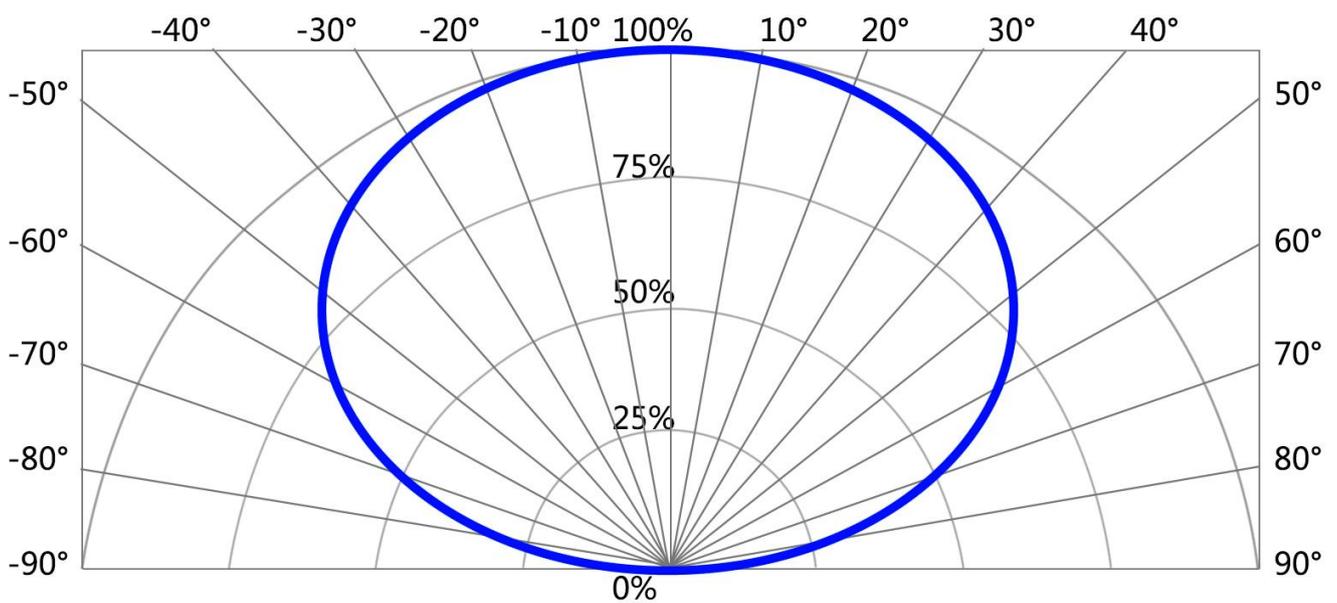

## 8.Cautions


### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



### 2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

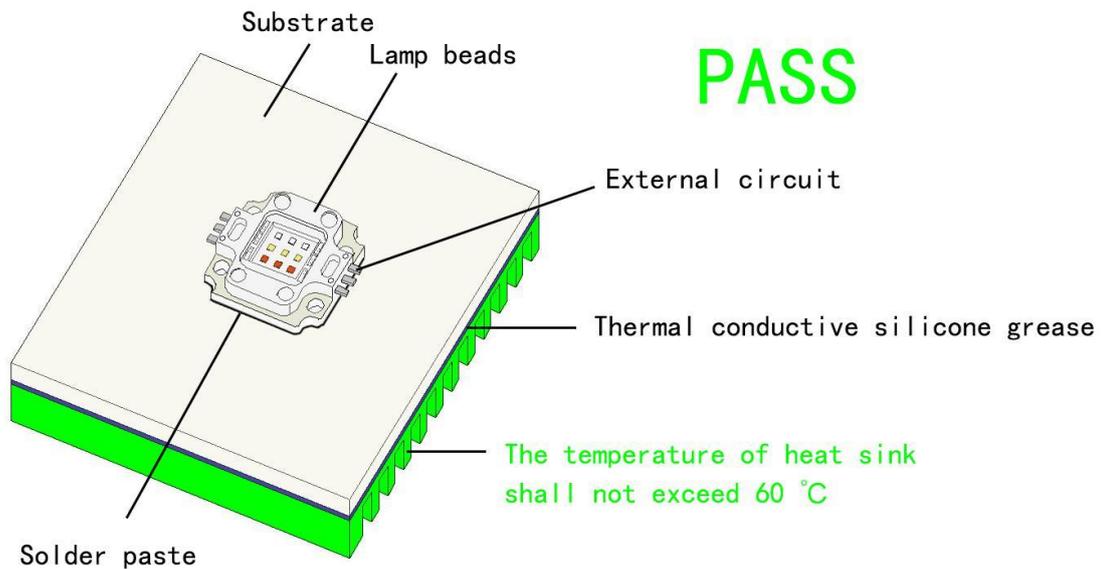

**PASS**

**OK**

