


PRODUCT SPECIFICATION

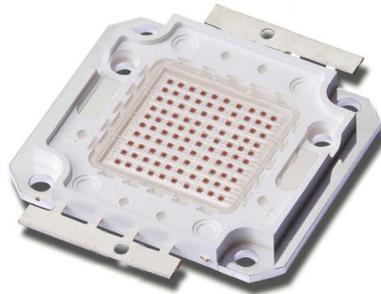

Part No.: WL-P100EP4242R140-630
High Power LED

Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Cautions	P6

3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	3500	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	4000	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	75	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Lead Soldering Temperature	TSOL	260°C	

4. Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	R	20	21	22	V	I _F =3500mA
Luminous Flux	Φ	R	4500	5000	5500	lm	I _F =3500mA
Peak Wavelength	WIP	R	630	632.5	635	nm	I _F =3500mA
Reverse Current	IR		0		10	μA	V _R =5V
Viewing Angle	2θ1/2				140	deg	I _F =3500mA
Recommend Forward Current	IF(rec)	R			3500	mA	


Notes:

Measurement tolerance of forward voltage±0.1V


5. Optical Character Curves

(25 ° Ambient Temperature Unless Otherwise Noted)


Forward Current vs. Forward Voltage
Tc=25C

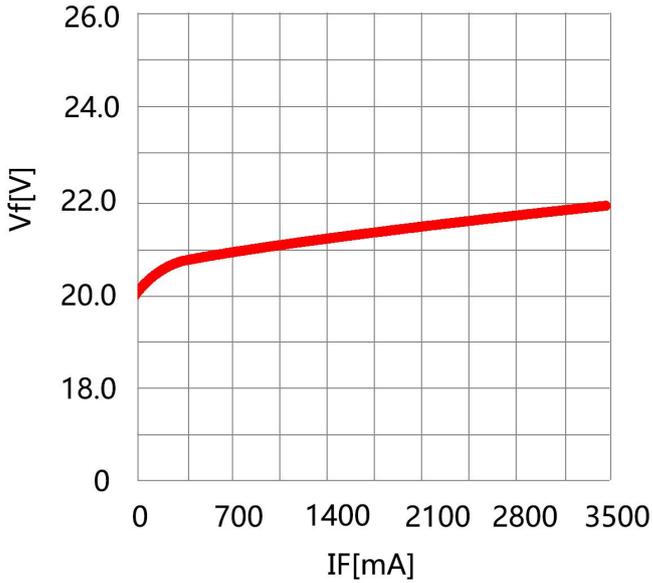


Forward Current vs. Relative Luminous Flux
Tc=25C

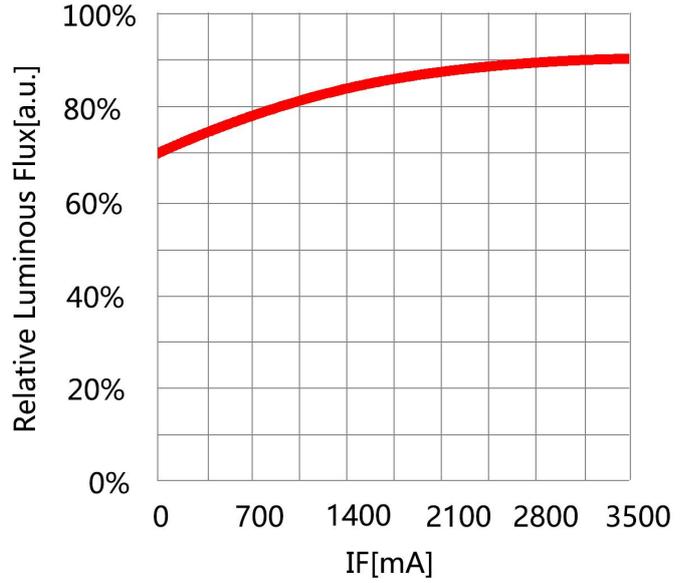


Case Temperature vs. Forward Voltage
If=3500mA

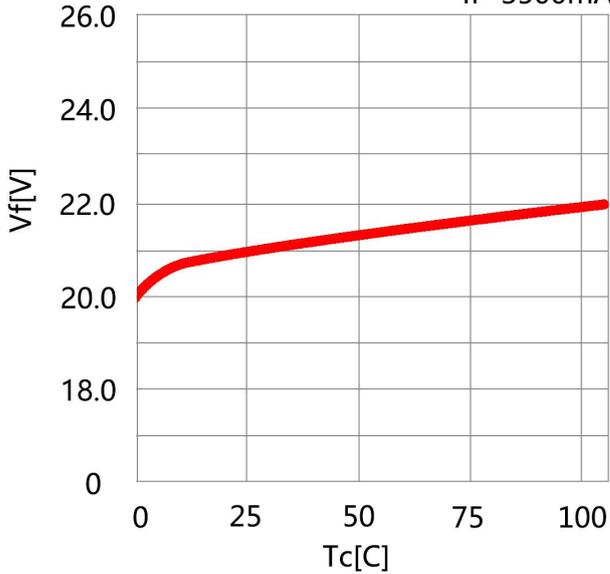


Case Temperature vs. Relative Luminous Flux
If=3500mA

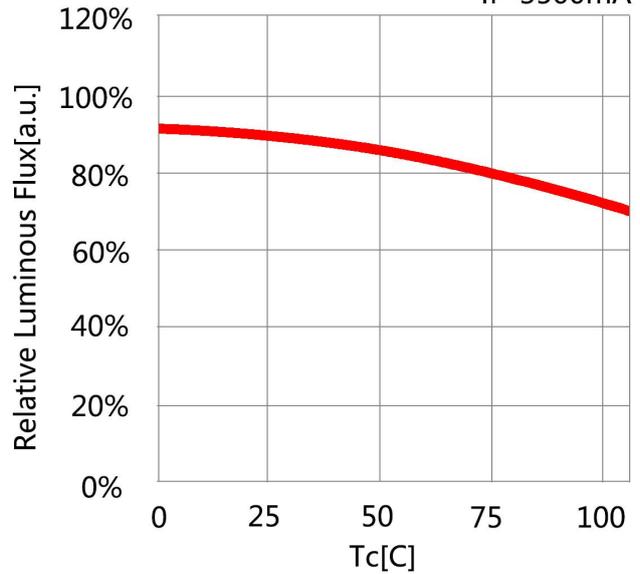

6. Spectrum Curves

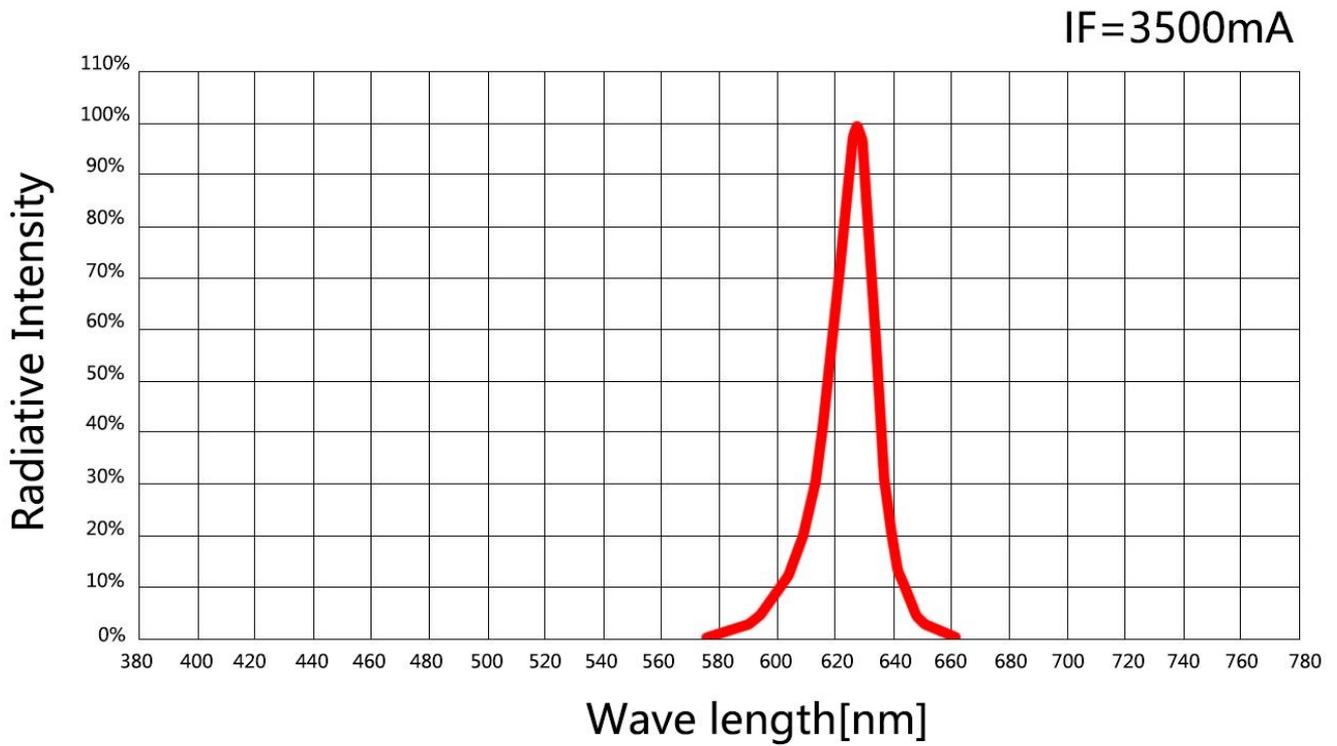

7. Viewing Angle Curves

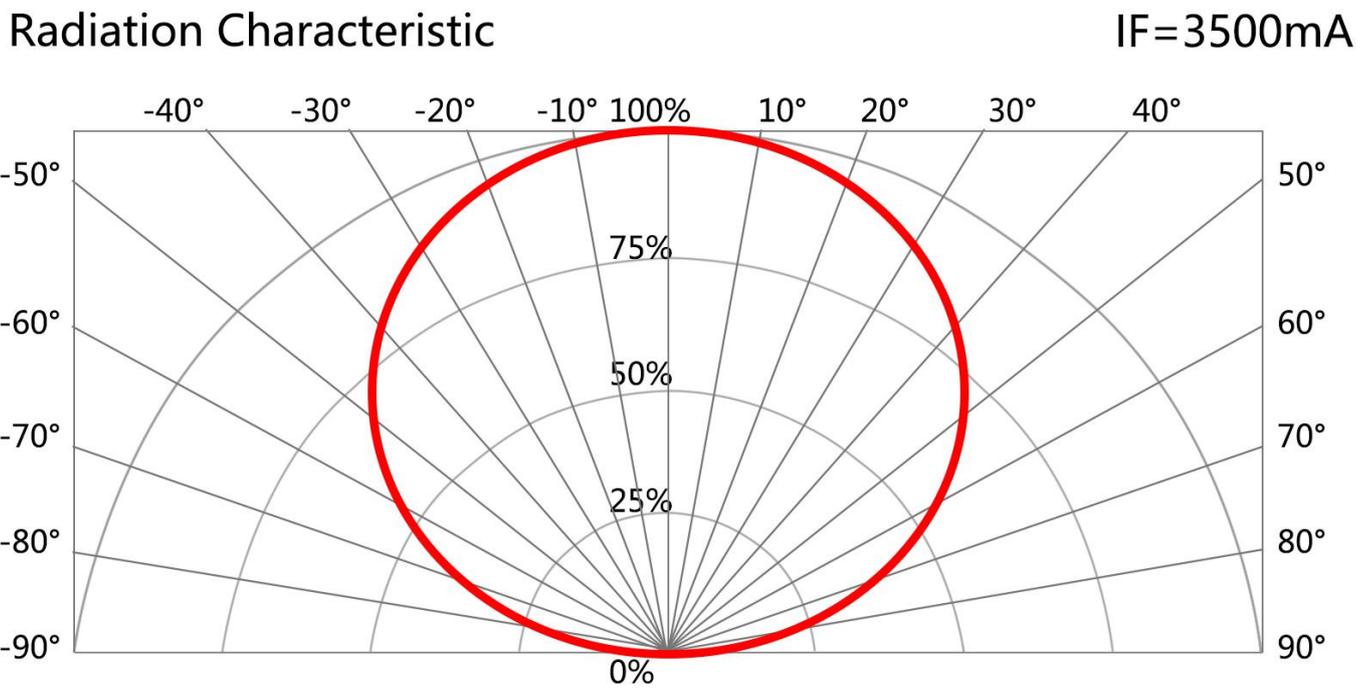

8.Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

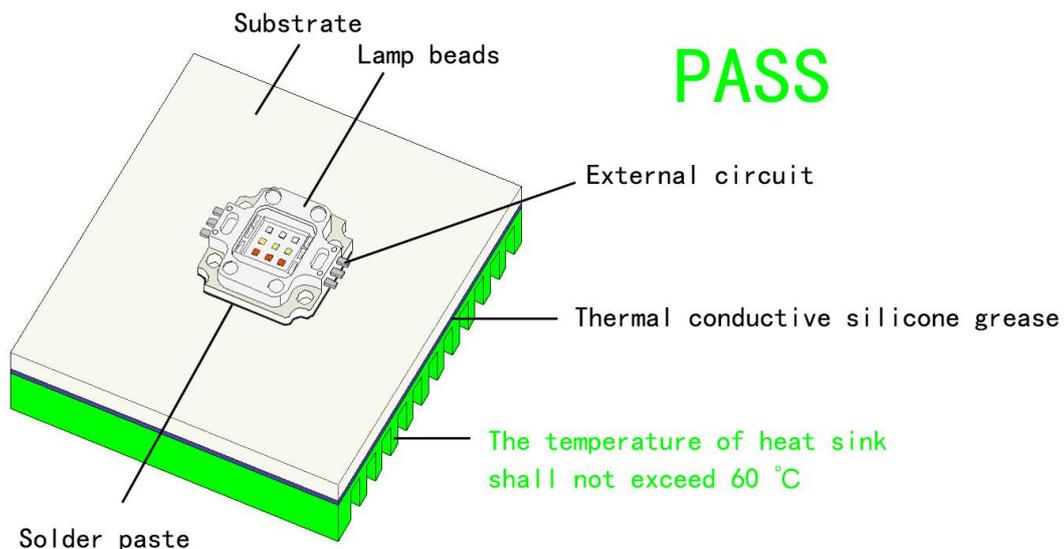

OK

