

PRODUCT SPECIFICATION



PartNo.:WL-P300EP4242R140-670

High Power LED




Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Cautions	P6

1. Product Features

- High Brightness Red LED Plane Package
- Viewing Angle 140 Degree
- Chip Material: AlGaInP
- RoHS Compliant

2. Dimensions

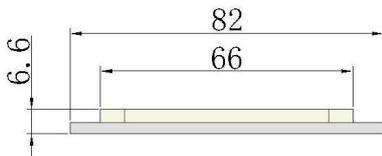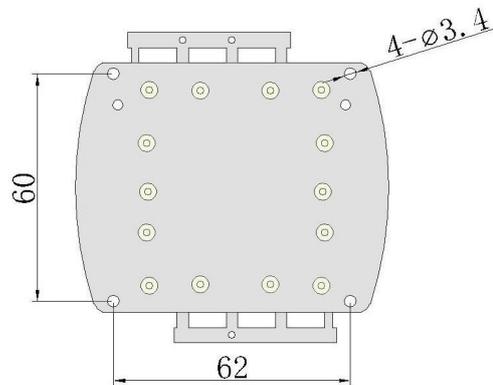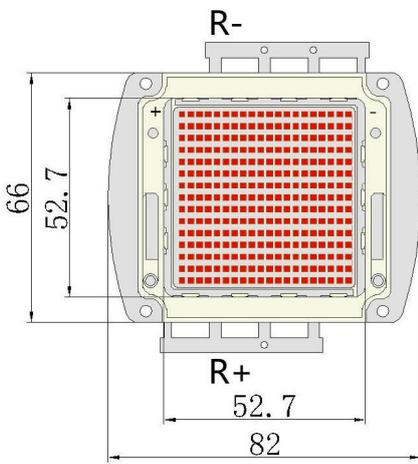

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.1 mm unless otherwise noted.

3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	5250	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	5500	mA
Reverse Voltage	VR	58	V
Power Dissipation	PD	230	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Soldering iron welding temperature (reflow welding is not allowed)	TSOL	350°C	

4. Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	R	42	43	44	V	IF=5250mA
Luminous Flux	Φ	R	12000		17000	Lm	IF=5250mA
Peak Wavelength	WIP	R	670	673	675	nm	IF=5250mA
Reverse Current	IR		0		10	μA	VR=65V
Viewing Angle	2θ1/2				140	deg	IF=5250mA
Recommend Forward Current	IF(rec)	R			5250	mA	


Notes:

Measurement tolerance of forward voltage ±0.1V


5. Optical Character Curves

(25 ° Ambient Temperature Unless Otherwise Noted)


Forward Current vs. Forward Voltage
Tc=25C

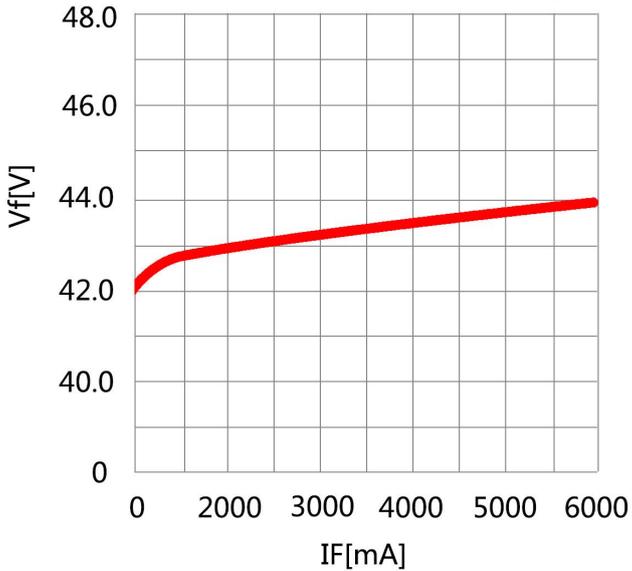


Forward Current vs. Relative Luminous Flux
Tc=25C

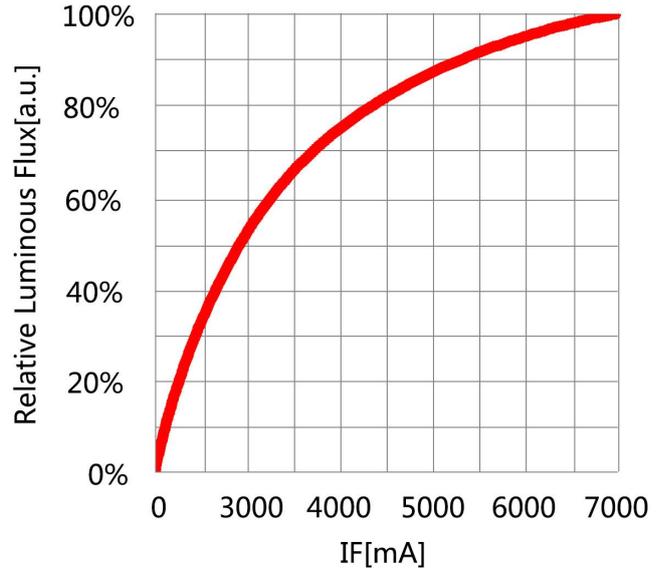


Case Temperature vs. Forward Voltage
If=5250mA

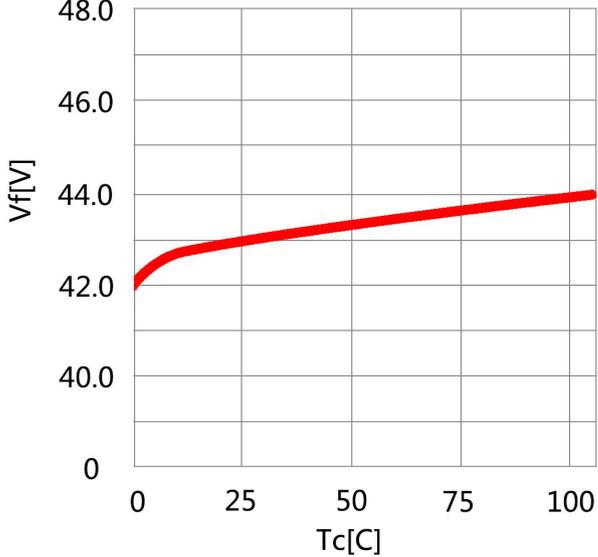


Case Temperature vs. Relative Luminous Flux
If=5250mA

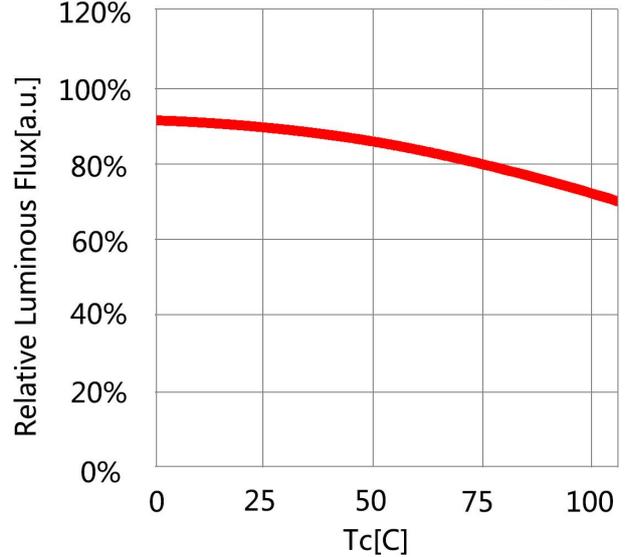

6. Spectrum Curves

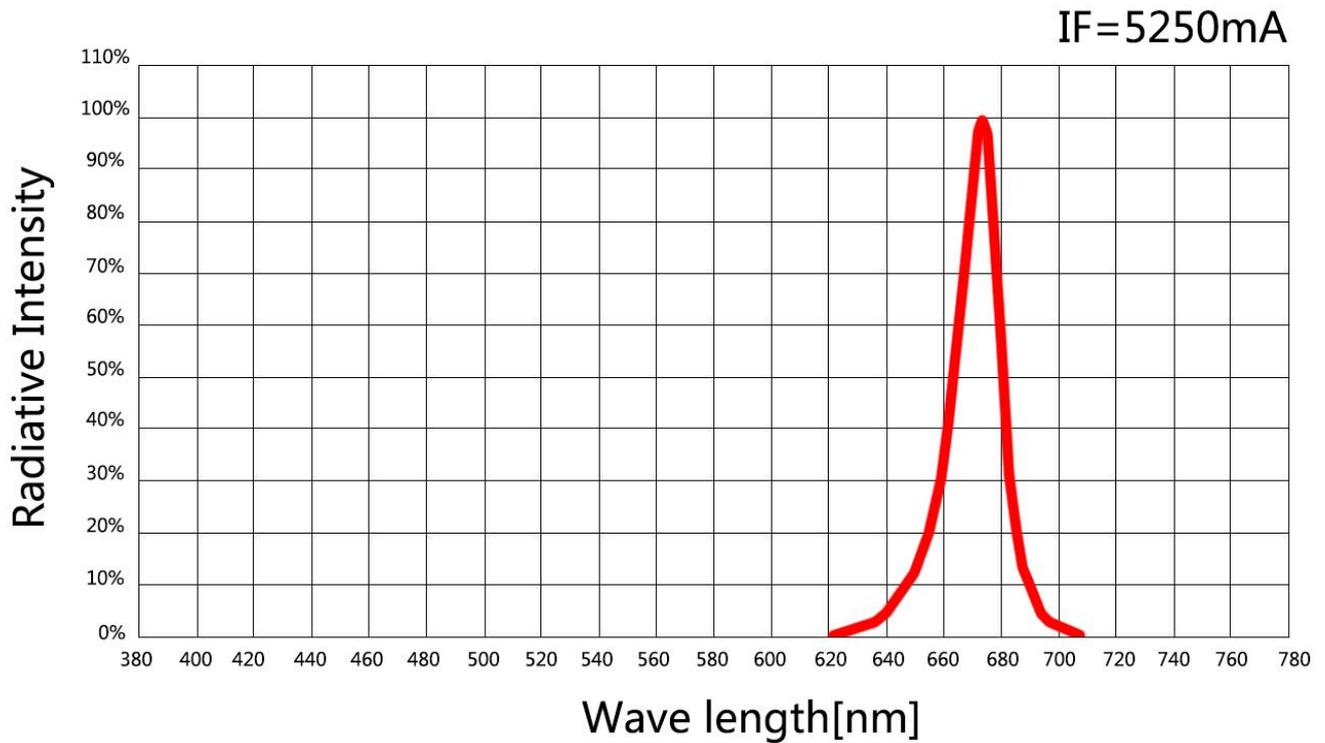

7. Viewing Angle Curves

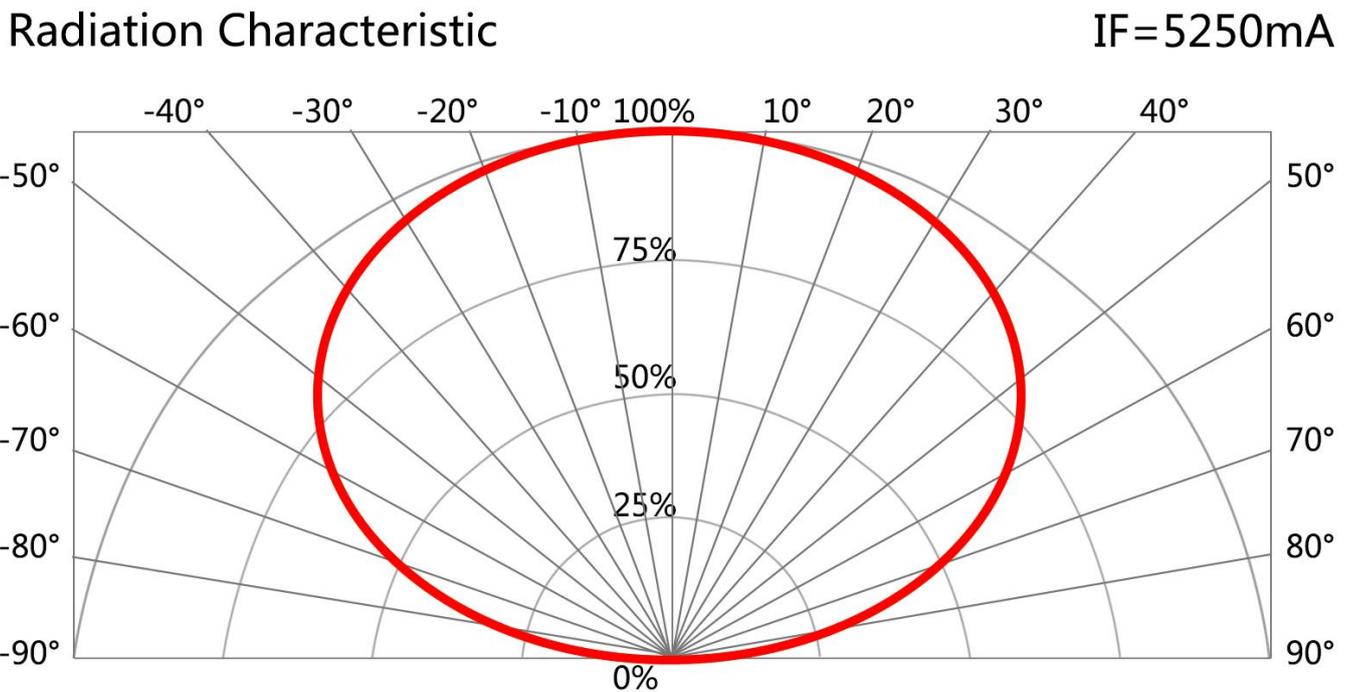

8.Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

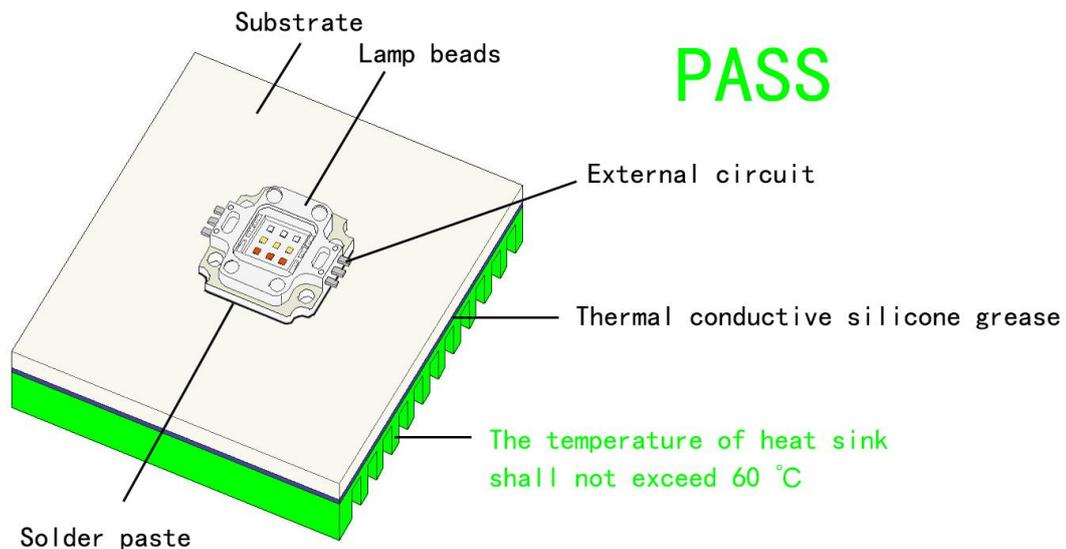

OK

