

PRODUCT SPECIFICATION



Part No.: WL-05P2835EP30IR-910
SMD High Power LED


Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8


1. Product Features

- High Brightness IR LED Plane Package
- Viewing Angle 30 Degree
- Chip Material: InGaN AlGaInP
- RoHS Compliant


2. Dimensions

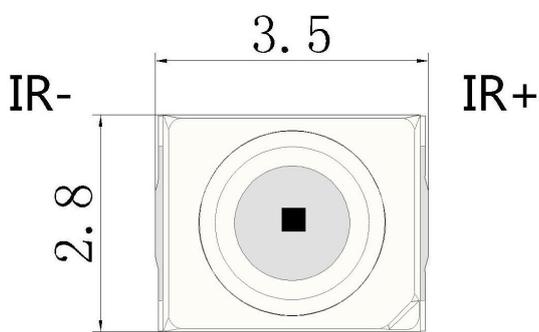


Top view

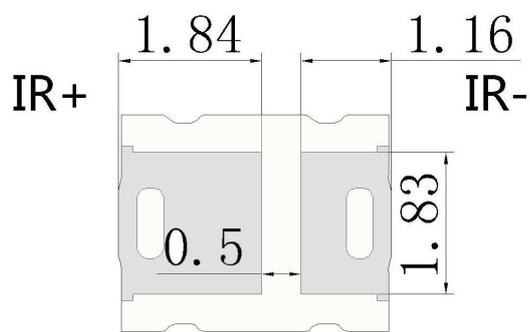

Bottom view

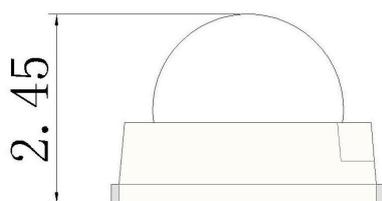

Side view

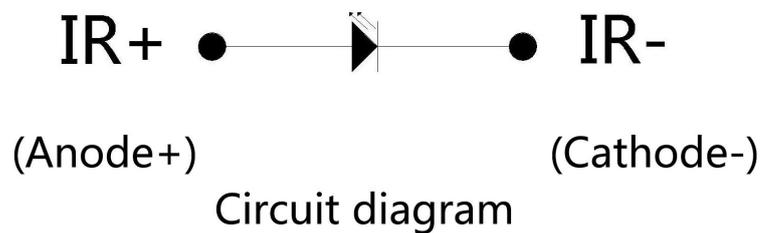

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.1 mm unless otherwise noted.



3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	150	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	200	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	0.5	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Lead Soldering Temperature	TSOL	260°C	

4. Optical Character @ Ta=25° C





Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	IR	1.3		1.6	V	IF=150mA
Radiant Power	PO	IR	50	60	70	mW	IF=150mA
Peak Wavelength	WLP	IR	905	910	915	nm	IF=150mA
Reverse Current	IR		0		1	μA	VR=5V
Viewing Angle	2θ1/2			30		deg	IF=150mA
Recommend Forward Current	IF(rec)	IR			150	mA	

Notes:


Measurement tolerance of forward voltage ±0.1V

5. Optical Character Curves


(25 ° Ambient Temperature Unless Otherwise Noted)

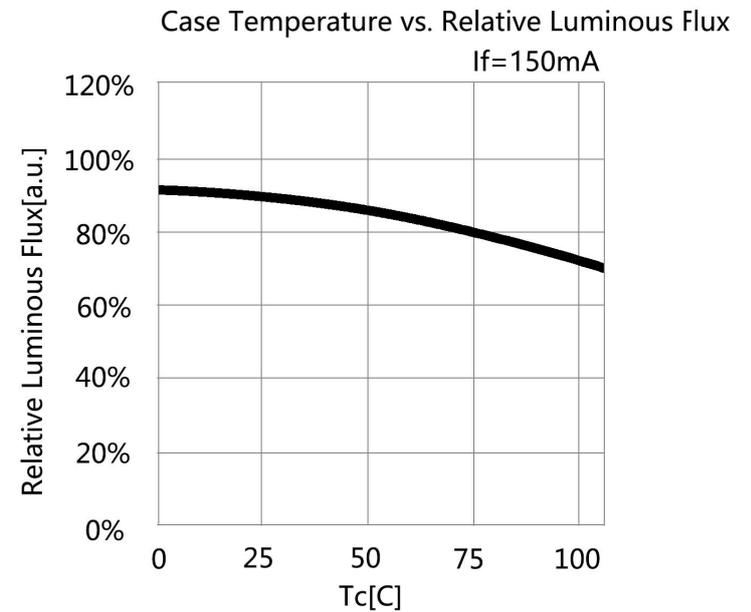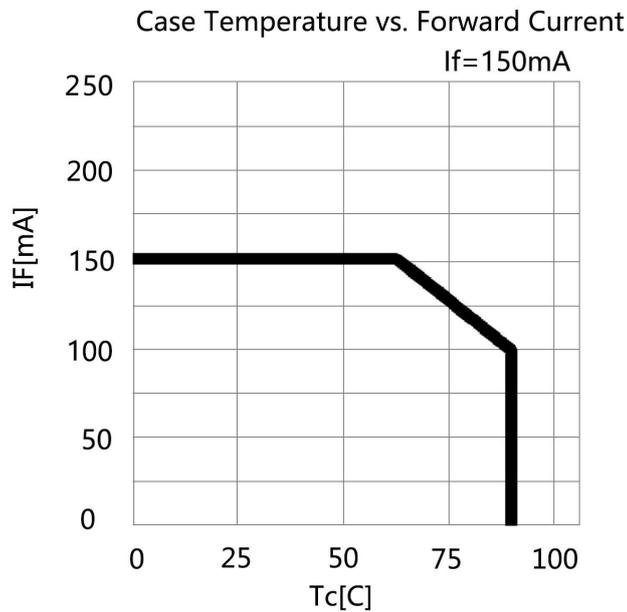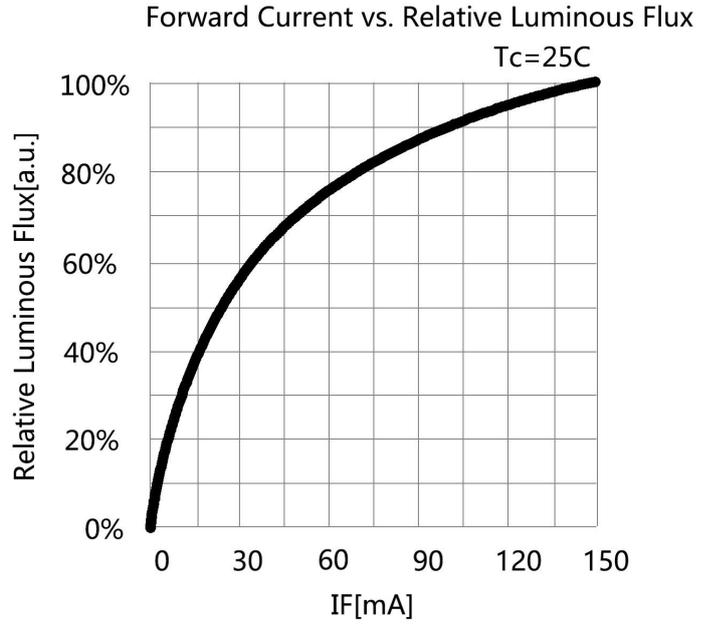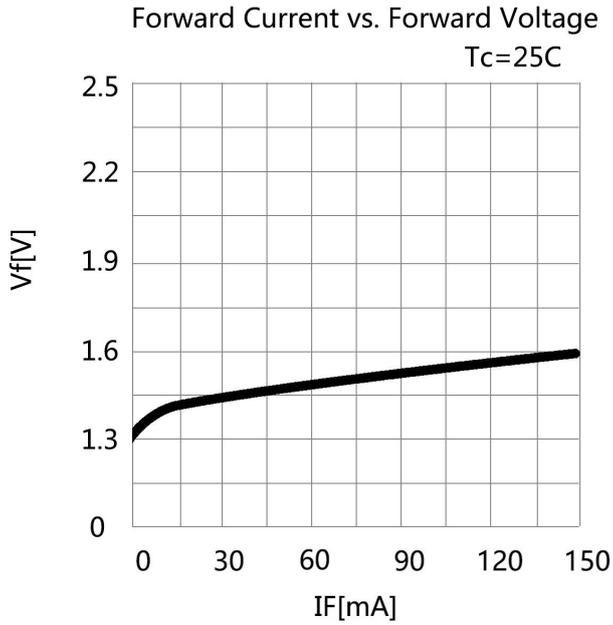

6. Spectrum Curves

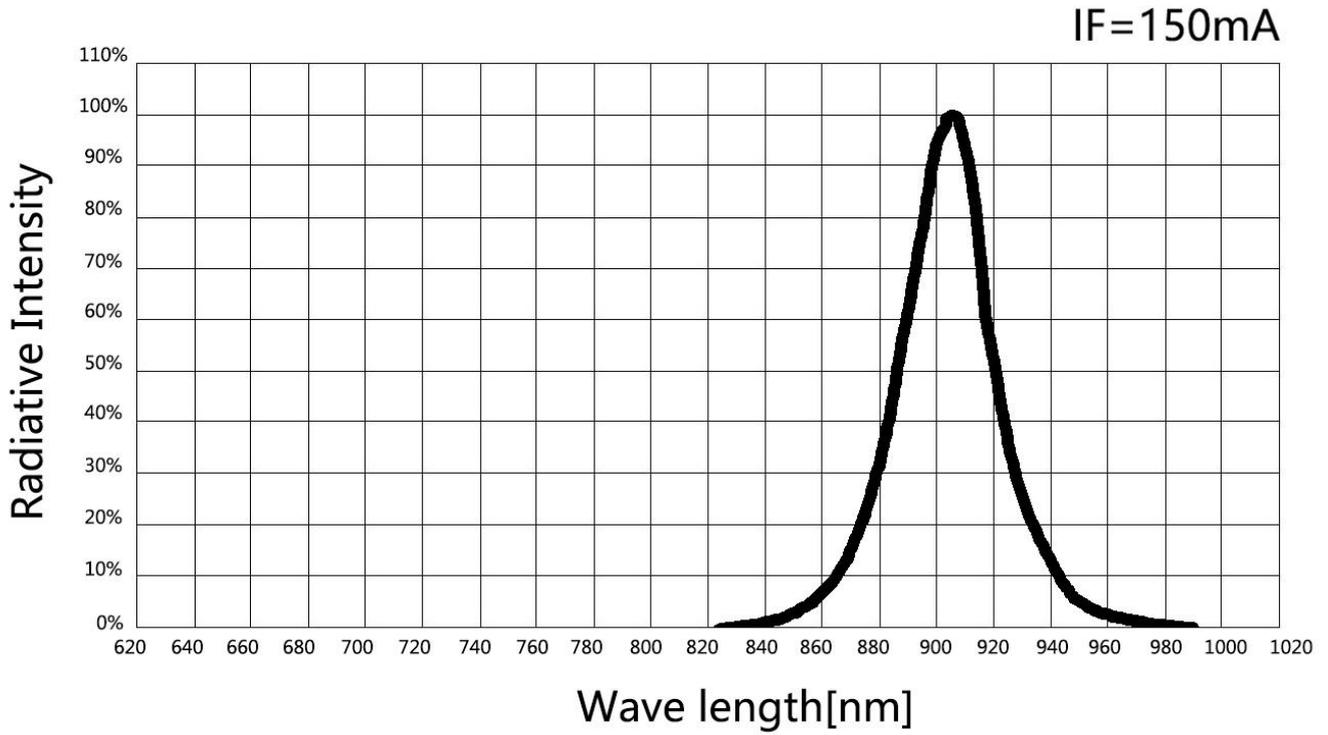


7. Viewing Angle Curves

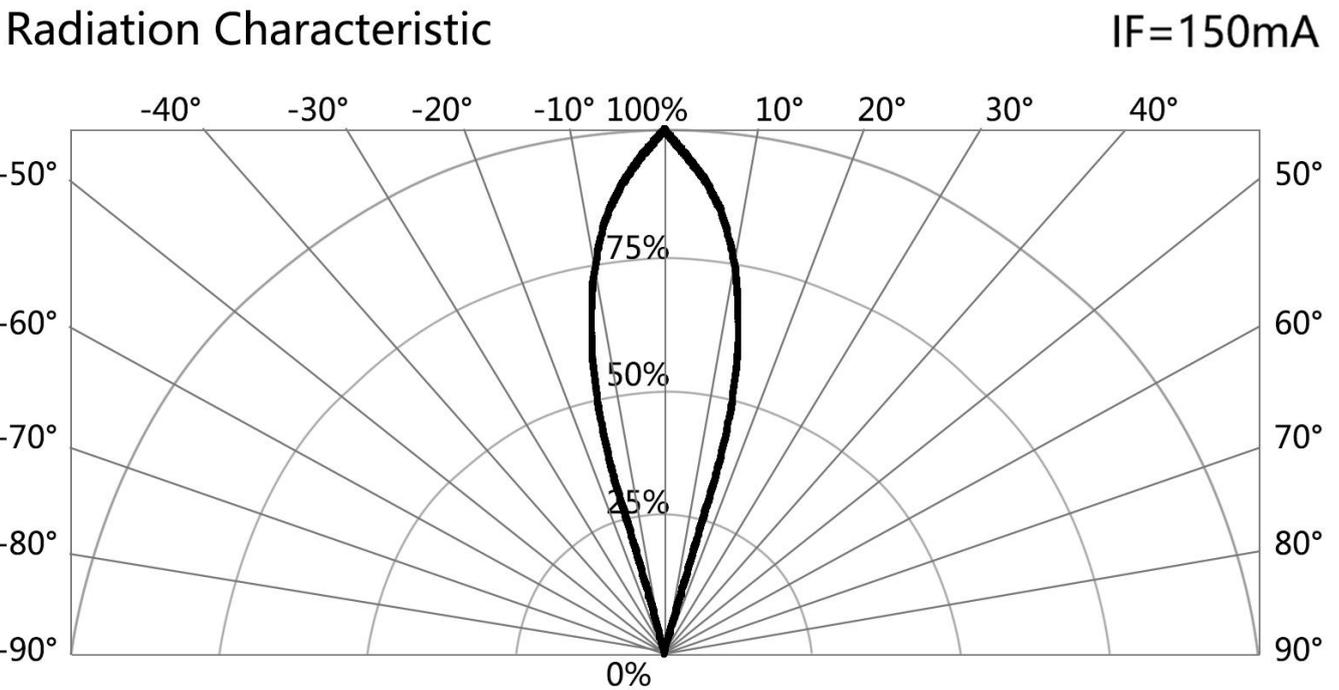

8. Tape & Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at 25°C ± 3°C, humidity 50-60%. If unpacked above 1 week, bake at 60 ± 5°C for 10-12 hours before weld.

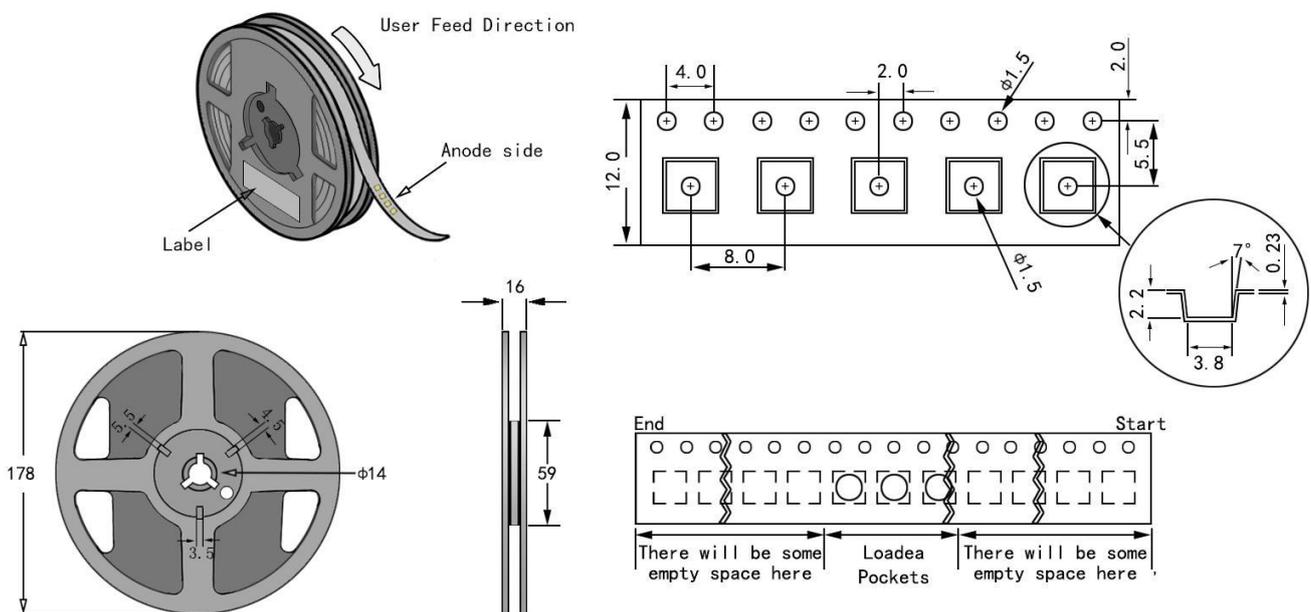


Notes:

1. QTY: 2000pcs/Reel
2. Tolerance ±0.2mm.
3. Package: P/N

9.Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

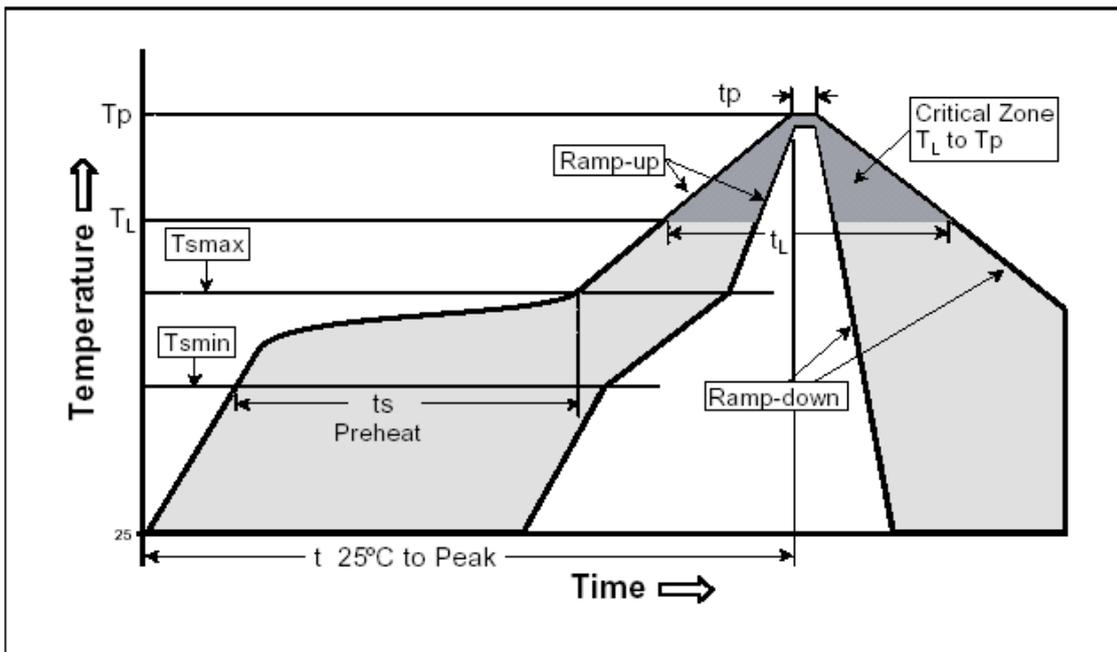

Temperature Curve Character	Lead-free solder
Average heating rate(T_{smin} to T_p)	Top 3 °C / s
Preheating: Minimum temperature (T_{smin})	90°C
Preheating: Maximum temperature (T_{smax})	200°C
Preheating: Time (T_{smin} to T_{smax})	60-180 s
Duration above temperature: Temperature T_L	240°C
Duration above temperature: Time t_L	60-150 s
Peak/classification temperature (T_p)	260°C
Time within 5°C of actual peak temperature (t_p)	20-40 s
Cooling speed	The highest 6 °C / s
Time to reach peak temperature at 25°C	8 minutes Max

10. Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

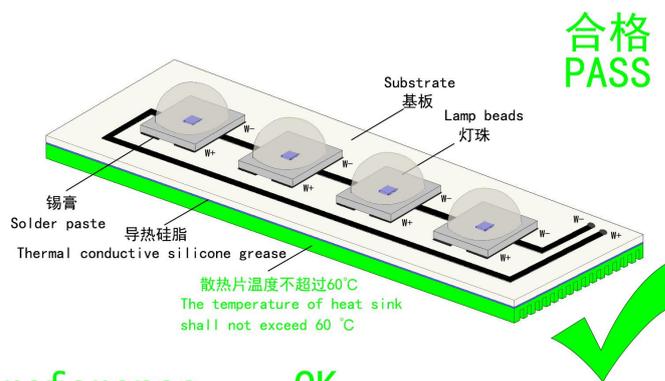

3. Installation Conditions

reference OK

- A、 Do not exert any pressure on the LED area during the use of the led beads. such as below:

